

OLET



Features:

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.
 Wattage: 28-35W
 High Lumen: 110lm/w
 3 STEP Mac Adam
 High efficiency, low flicker driver
 Lamp Type: COB
 Operating Temperature: -20°C to 45°C
 Glow Wire Test 850° C
 Warranty: 5 Years
 Life Time: 50,000hrs at ta 25°C
 (L80/B10)

Fields of Application:

Retail
 Education
 Galleries hotels
 Living spaces

Installation Method:

Suspended.

Wattage(W)	:	28	35		
Finish	:	White(W)	Black(B)	Gray(G)	
Kelvin*	:	2700K	3000K	4000K	5000K 5700K
Beam Angle	:	12°	30°	36°	45° 60°
CRI	:	80+	90+	97+	
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Casambi


*Special Color and Finish on request

Product Code (96810635):

Wattage	Lumens(lm)	Dimension(ØxH) mm	Cut Out (mm)
28	3080LM	106x256	90
35	3850LM	106x256	90

*Luminous lux value is calculated for 4000K CRI>80

Photometric:

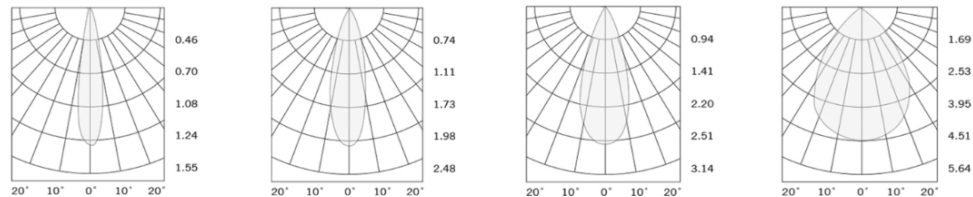

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96810635 27K 12D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	12D - 12°	8->80	1 - ON/OFF	W-White
30K - 3000K	30D - 30°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°	9->97	3 - DALI	G-Gray
50K - 5000K	45D - 45°		4 - Phase Dimming	
57K - 5700K	60D - 60°		5 - Casambi	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C