



OPA



Features:

- OPA Adjustable track light for installation on a mains voltage track.
- High quality die cast aluminum body with Anti Yellowing PMMA LENS.
- Universal line voltage led track lighting heads, fit in 3 phase 4 wires track systems.
- Adjustable Angle with 355 degrees horizontal rotation, 90 degrees vertical adjustment.
- Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

- Input Voltage : 220- 240 V AC, 50 Hz.
- Wattage : 8 - 12W
- High Lumen : 115lm/w
- 3 STEP Mac Adam
- High efficiency, low flicker driver
- Lamp Type : COB
- Operating Temperature: -20°C to 45°C
- Glow Wire Test 850° C
- Warranty : 5 Years
- Life Time : 50,000hrs at 25°C (L80/B10)

Fields of Application:

- Retail
- Education
- Galleries hotels
- Living spaces

Installation Method:

On an electrified track or special base.

Wattage(W)	:	8	10	12			
Finish	:	White(W)	Black(B)				
Kelvin*	:	2700K	3000K	3500K	4000K	5000K	5700K
Beam Angle	:	15°	24°	45°	60°		
CRI	:	80+	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth	


*Special Color and Finish on request

Product Code (96505512):

Wattage	Lumens(lm)	Dimension(Ø x L) mm
8	920LM	55 X 110
10	1150LM	55 X 110
12	1380LM	55 X 110

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

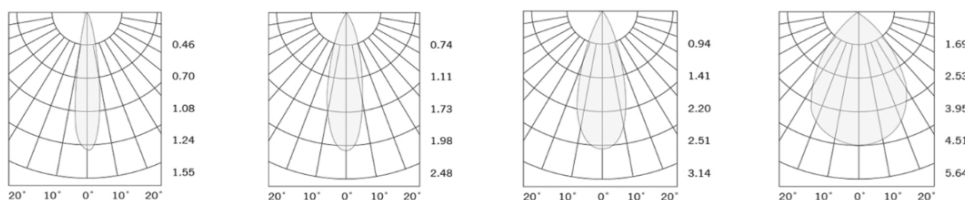

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96505512 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
35K - 3500K	45D - 45°		3 - DALI	
40K - 4000K	60D - 60°		4 - Phase Dimming	
50K - 5000K			5 - Bluetooth	
57K - 5700K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C