



## OPA



### Features:

OPA Adjustable track light for installation on a mains voltage track.  
 High quality aluminum diecast body with Anti Yellowing PMMA LENS.  
 Universal line voltage led track lighting heads, fit in 3 phase 4 wires track systems.  
 Adjustable Angle with 355 degrees horizontal rotation, 90 degrees vertical adjustment .  
 Homogenous, well-balanced light dispersing, no shadow.

### Technical Specifications:

Input Voltage : 220- 240 V AC, 50 Hz.  
 Wattage : 15 - 20W  
 High Lumen : 115lm/w  
 3 STEP Mac Adam  
 High efficiency, low flicker driver  
 Lamp Type : COB  
 Operating Temperature: -20°C to 45°C  
 Glow Wire Test 850° C  
 Warranty : 5 Years  
 Life Time : 50,000hrs at 25°C (L80/B10)

### Fields of Application:

Retail  
 Education  
 Galleries hotels  
 Living spaces

### Installation Method:

On an electrified track or special base.

|            |            |          |       |               |           |
|------------|------------|----------|-------|---------------|-----------|
| Wattage(W) | : 15       | 20       |       |               |           |
| Finish     | : White(W) | Black(B) |       |               |           |
| Kelvin*    | : 2700K    | 3000K    | 3500K | 4000K         | 5000K     |
| Beam Angle | : 15°      | 24°      | 45°   | 60°           |           |
| CRI        | : 80+      | 90+      |       |               |           |
| Driver     | : ON/OFF   | 0/1-10V  | DALI  | Phase Dimming | Bluetooth |


\*Special Color & Finish on request

### Product Code (96506520):

| Wattage | Lumens(lm) | Dimension(Ø x L) mm |
|---------|------------|---------------------|
| 15      | 1725LM     | 65 X 175            |
| 20      | 2300LM     | 65 X 175            |

\*Luminous flux value is calculated for 4000K CRI>80

### Photometric:

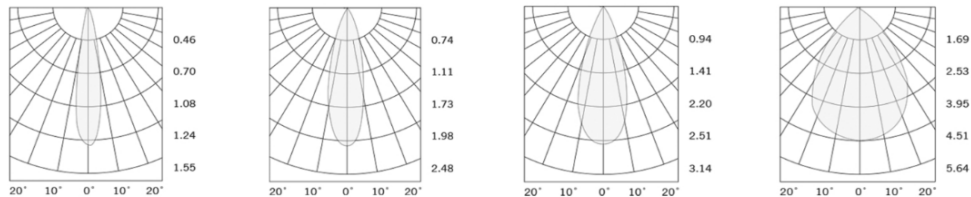

### Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96506520 27K 15D 8 1 W

| CCT         | Beam Angle | CRI   | Driver            | Finish  |
|-------------|------------|-------|-------------------|---------|
| 27K - 2700K | 15D - 15°  | 8->80 | 1 - ON/OFF        | W-White |
| 30K - 3000K | 24D - 24°  | 9->90 | 2 - 0/1-10V       | B-Black |
| 35K - 3500K | 45D - 45°  |       | 3 - DALI          |         |
| 40K - 4000K | 60D - 60°  |       | 4 - Phase Dimming |         |
| 50K - 5000K |            |       | 5 - Bluetooth     |         |

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C