



OPA



Features:

OPA adjustable track light for installation on a mains voltage track.
High quality aluminum diecast body with Anti Yellowing PMMA LENS.
Universal line voltage led track lighting heads, fit in 3 phase 4 wires track systems.
Adjustable Angle with 355 degrees horizontal rotation, 90 degrees vertical adjustment.
Homogenous, well-balanced light dispersing, no shadow

Technical Specifications:

Input Voltage : 220- 240 V AC, 50 Hz.
Wattage : 25 - 30W
High Lumen : 115lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type : COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty : 5 Years
Life Time : 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail
Education
Galleries hotels
Living spaces

Installation Method:

On an electrified track or special base.

Wattage(W)	:	25	30				
Finish	:	White(W)	Black(B)				
Kelvin*	:	2700K	3000K	3500K	4000K	5000K	5700K
Beam Angle	:	15°	24°	45°	60°		
CRI	:	80+	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth	


*Special Color & Finish on request

Product Code (96507530):

Wattage	Lumens(lm)	Dimension(Ø x L) mm
25	2875LM	75 x 190
30	3450LM	75 x 190

*Luminous Lux value is calculated for 4000K & CRI>90

Photometric:

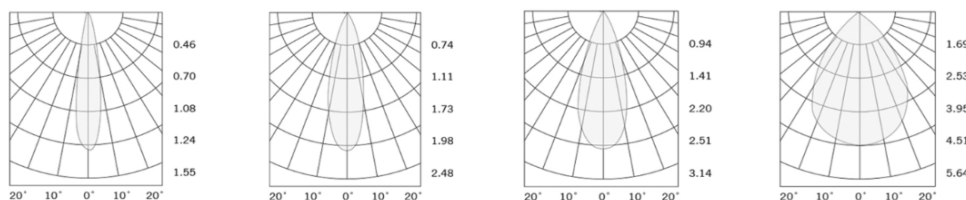

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96507530 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
35K - 3500K	45D - 45°		3 - DALI	
40K - 4000K	60D - 60°		4 - Phase Dimming	
50K - 5000K			5 - Bluetooth	
57K - 5700K				