



ORAS



Features:

ORAS Is Recessed linear downlights are sleek, elongated lighting fixtures installed into ceilings or walls, that creating a modern, minimalist appearance.

Die cast aluminum body is durability, and providing excellent strength and resistance to corrosion, with PMMA Lens.

The Lens help to create a soft, even illumination, reducing glare and harsh shadows.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.
 Wattage: 24W
 High Lumen: 85lm/w
 3 STEP Mac Adam
 High efficiency, low flicker driver
 Lamp Type: COB
 Operating Temperature: -20°C to 45°C
 Glow Wire Test 850° C
 Warranty: 5 Years
 Life Time: 50,000hrs at ta 25°C
 (L80/B10)

Fields of Application:

Retail
 Education
 Galleries hotels
 Living spaces

Installation Method:

Recessed

Wattage(W)	: 24			
Finish	: White(W)	Black(B)		
Kelvin*	: 2700K	3000K	4000K	5000K
Beam Angle	: 15°	24°	38°	
CRI	: 90+			
Driver	: ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


*Special Color and Finish on request

Product Code (96804504):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut Out (mm)
24	2040LM	280x45x42	270x38

*Luminous lux value is calculated for 4000K CRI>80

Photometric:

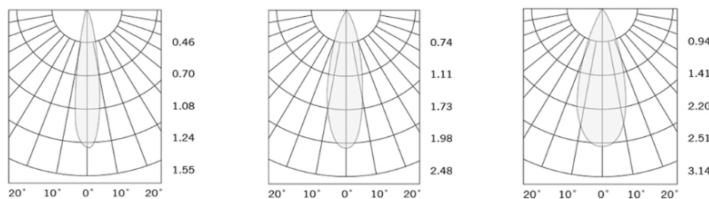

Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96804504 27K 15D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	9->90	1 - ON/OFF	W-White
30K - 3000K	24D - 24°		2 - 0/1-10V	B-Black
40K - 4000K	38D - 38°		3 - DALI	
50K - 5000K			4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C