


OVY I



Description:

OVY I is a ceiling recessed small wattage light typically feature durable, weather-resistant housings. Excellent heat dissipation.

It include features such as corrosion resistance , dustproof, anodized and polished, sandblasted, not easy to rust and fade.

Stainless Steel Cover with Die cast aluminum body.

It comes with different CCT LED sources and Honeycomb optionally, this family is a perfect solution to the requirement.

It can be used application for Indoor and Landscape lighting.

Product Specifications:

Front cover : Stainless Steel 316

Housing : Die cast aluminum

Coating: Powder Coating

Glass : Tempered glass

Gasket: Moulding shaped silicone seal

Lens/Reflector : Optical lens (efficiency>90%)

Power Cable: 0.5 mt. power cable included

Driver : High efficiency, low flicker driver

Installation Type: Ceiling Recessed

Adjustable: No

Technical Specifications:

Wattage: 2W

Voltage: 24VDC / 220-240VAC

Frequency: 50-60Hz

Light Source: OSRAM/CREE

Lumen: 75lm/W

Mac Adam: 3 Step

Safety Class: II

Working Temperature:-20°C to 55°C

Life Time: 50,000hrs (L80/B10) at 25°C

Warranty: 5 Years

Parameter:

Wattage(W)	:	2W
Finish	:	Stainless Steel 316 (SS)
Kelvin*	:	2700K/ 3000K / 4000K / 6000K
Beam Angle	:	12° / 25° / 35° / 45° / 55° / Diffused
CRI	:	80+
Control Mode	:	ON/OFF / DALI / 0 / 1-10V

*Lumen values are calculated at 45° beam angle and 4000K color temperature.

Standard :

EN 60598-1

EN 60598-2-2

EN 60598-3-2

EN 60598-3-3

Order Code:

Product Code	Wattage	CCT	Voltage	Beam Angle	Finish	Control Mode
539050	02-2W	27-2700K	D - 24VDC	12-12°	SS-Stainless Steel 316	1-ON/OFF
		30-3000K		25-25°		2-DALI
		40-4000K		35-35°		3-0/1-10V
		60-6000K		45-45°		
				55-55°		
				D-Diffused		


Ex: Order Code: 5390500227D'12SS1

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Product Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
539050	02-2W	27-2700K	A - 220 - 240VAC	12-12°	SS-Stainless Steel 316	1-ON/OFF
		30-3000K		25-25°		2-DALI
		40-4000K		35-35°		3-0/1-10V
		60-6000K		45-45°		
				55-55°		
				D-Diffused		

Ex: Order Code: 5390500227A'12SS1

Photometric:

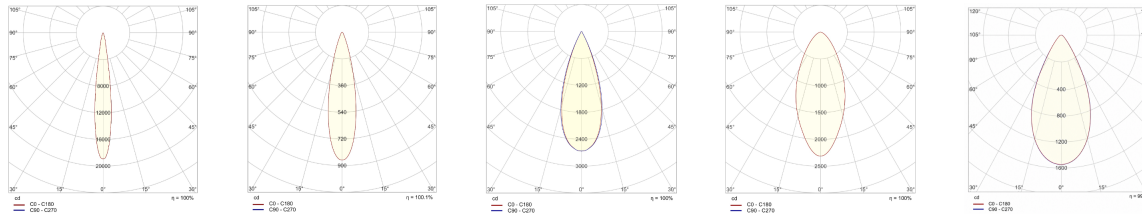

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C