

QUIN



Features:

QUIN Is Decorative Magnetic track light installed on Low Voltage and wattage Magnetic Track.
Available in different styles and finishes to match various interior decors.
Body Material made of aluminum with LED technology for energy savings and longevity.
This is ideal for highlighting specific objects or areas.
Low-voltage DC40V input scheme is adopted.
The magnetic track allows you to easily move and adjust the position of the light fixture along the track.

Technical Specifications:

Input Voltage: 40V AC, 50 Hz.
Wattage: 8W
High Lumen: 80lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at ta 25°C
(L80/B10)

Fields of Application:

Retail
Education
Galleries hotels
Living spaces

Installation Method:

On an electrified Magnetic track 40V DC

Wattage(W)	:	8			
Finish	:	White(W)	Black(B)	Gray(G)	
Kelvin*	:	2700K	3000K	4000K	5000K
Beam Angle	:	24°	36°	50°	
CRI	:	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


*Special Color and Finish on request

Product Code (76505408):

Wattage	Lumens(lm)	Dimension (ØxH) mm
8	640LM	54x70

*Luminous lux value is calculated for 4000K CRI>90

Photometric:

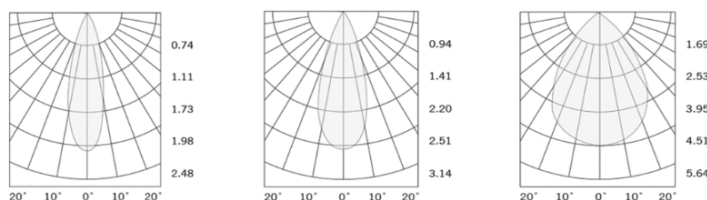

Standards

EN 60598-1
EN 60598-2-2
EN 60598-2-22
EN 60598-3-2
EN 60598-3-3

Order Code Ex: 76505408 27K 24D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	24D - 24°	9->90	1 - ON/OFF	W-White
30K - 3000K	36D - 36°		2 - 0/1-10V	B-Black
40K - 4000K	50D - 50°		3 - DALI	G-Gray
50K - 5000K			4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C