


QUINA

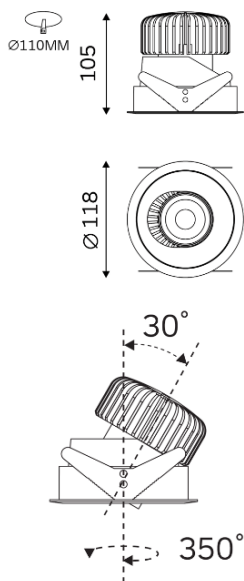

Features:

QUINA is a recessed adjustable downlight is designed with a durable aluminum body and high-performance optical lens, making it suitable for both functional and decorative lighting applications.

Beam Angle available in narrow, medium, and wide beam angles to provide flexibility in light distribution depending on the project requirements.

Greater angle adjustment (up to 30° unidirectional), and at the same time with horizontal adjustment.

The product also available with a range of accessories, including a honeycomb louvre for reduces glare and provides a softer visual comfort, linear spread glass for elongated light distribution, and clear glass for maximum output and clarity, Wall Washer for distributes light evenly across vertical surfaces for architectural emphasis, Zoom Lens – allows adjustable beam angles for flexible lighting effects.

This combination of refined design, advanced optics.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50/60Hz.

Wattage: 20-26W

Efficiency: 100lm/W

High efficiency, low flicker driver

3 STEP Mac Adam

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Lifetime 50,000hrs at a 25°C(L90/B10)

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Museums

Restaurants

Painting Exhibitions

Theaters

Installation Method:

Recessed Adjustable





Wattage(W)	:	20	24	26		
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	3500K	4000K	5700K
Beam Angle	:	20°	31°	43°	53°	60°
CRI	:	90+				
Driver	:	ON/OFF	DALI	Phase Dimming	1-10V	

*Special Color and Finish on request

Product Code (96811826.50):

Wattage	Lumens(lm)	Dimension (ØxH) mm	Cut Out  (mm)
20	2000LM	118x105	110
24	2400LM	118x105	110
26	2600LM	118x105	110

*Luminous flux value is calculated for 4000K CRI>90, 3 STEP Mac Adam



Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96811826.50 27K 20D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	20D - 20°	9-	1 - ON/OFF	W-
30K - 3000K	31D - 31°	>90	2 - DALI	White
35K - 3500K	43D - 43°		3 - Phase	B-Black
	53D - 53°		Dimming	
40K - 4000K	60D - 60°		4 - 1-10V	
57K - 5700K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C