


RARE

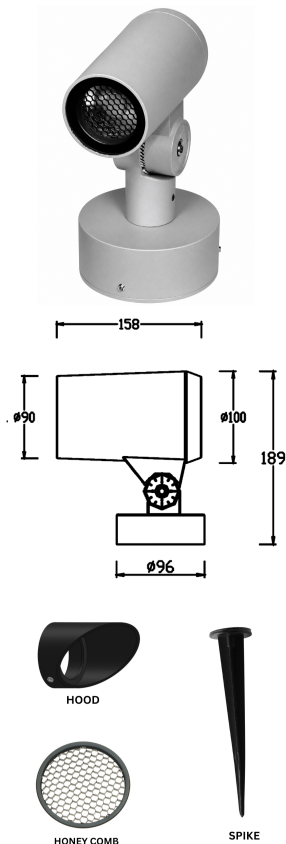

Description:

RARE is a outdoor spot / spike light for accent and general illumination with low as well as high power LED light sources, excellent heat dissipation.

Adapts high durability, weather-resistant housings suitable for outdoor use. Excellent heat dissipation. It include features such as corrosion resistance, dustproof, anodized and polished, sandblasted, not easy to rust and fade.

Its also comes with adjustable bracket Base and Round Base. The honeycomb, Round-meshed grill and Anti glare can make your lighting more dramatic or cinematic.

Toughened glass surface, with high hardness, not easy to break.

It has very wide application like trees, sign terraced landscape, urban lighting, internal and external walls of buildings, etc.

Product Specifications:

Housing : Die cast aluminum
Coating: Powder Coating
Glass : Tempered Glass
Gasket: Molding shaped silicone seal
Lens/Reflector : Optical lens (efficiency>90%)
Power Cable: 0.5 mt. power cable included
Driver : High efficiency, low flicker driver
Installation Type: Surface / Spike Mounted
Adjustable: Yes

Technical Specifications:

Wattage: 32 - 36W
Voltage: DC24V / 220-240V AC
Frequency: 50-60Hz
Light Source: CREE
Lumen: 75lm/W
Mac Adam: 3 Step
Safety Class: III
Working Temperature:-20°C to 55°C
Life Time: 50,000hrs (L80/B10) at 35°C
Warranty: 5 Years

Parameter:


Wattage(W)	:	32W / 36W
Finish	:	Grey (G) / Black (B) / Customized (C)
Kelvin*	:	2700K/ 3000K / 4000K / 6000K / RGB / RGBW
Beam Angle	:	3° / 5° / 8° / 10° / 15° / 30° / 60°
CRI	:	80+ 90+
Control Mode	:	ON/OFF / DALI / DMX

Order Code:

Product Code	Wattage	CCT	Voltage(DC)	Beam Angle	Finish	Control Mode
541091	32 - 32W	27-2700K	D-24VDC	3 - 3°	G-Grey	1-ON/OFF
	36 - 36W	30-3000K		5 - 5°	B- Black	2-DALI
		40-4000K		8 - 8°	C-Customized	3-DMX
		60-6000K		10 - 10°		
		82-RGB		15 - 15°		
		83-RGB DMX		30 - 30°		
		92 - RGBW		60 - 60°		
		93 - RGBW DMX				

Ex: Order Code: 5410913227D'3G1

Photometric :



Standards :

- EN 60598-1
- EN 60598-2-2
- EN 60598-3-2
- EN 60598-3-3

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Product Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
541091	32 - 32W	27-2700K	A-220-240VAC	3 - 3°	G-Grey	1-ON/OFF
	36 - 36W	30-3000K		5 - 5°	B- Black	2-DALI
		40-4000K		8 - 8°	C-Customized	
		60-6000K		10 - 10°		
				15 - 15°		
				30 - 30°		
				60 - 60°		

Ex: Order Code: 5410913227A'3G1

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C