


RIVO



Features:

RIVO is recessed adjustable downlight, die cast aluminum body .
Simple and easy appearance, in line with contemporary aesthetic concept.
Aluminum reflector for extend long service lifetime.
High light Transmissivity.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 15 - 18 W
High Lumen: 120lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty : 5 Years
Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants

Installation Method:

Recessed Trimless Adjustable.

Wattage(W)	:	15	18			
Finish	:	White(W)	Black(B)			
Kelvin*	:	3000K	4000K	5000K		
Beam Angle	:	15°	24°	36°		
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color & Finish on request

Product Code (96809918.40):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut out  (mm)
15	1800LM	99x99x128	103x108
18	2160LM	99x99x128	103x108

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

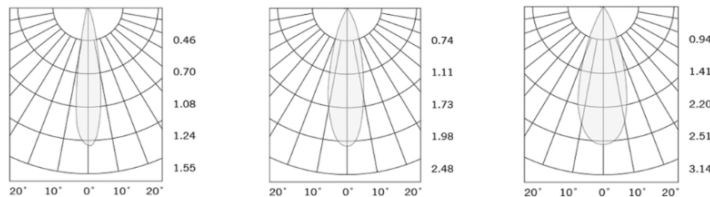

Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96809918.40 30K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	15D - 15°	8->80	1 - ON/OFF	W-White
40K - 4000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
50K - 5000K	36D - 36°		3 - DALI	
			4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C