


## RIVO



### Features:

RIVO is recessed adjustable downlight, die cast aluminum body .  
 Simple and easy appearance, in line with contemporary aesthetic concept.  
 Aluminum reflector for extend long service lifetime.  
 High light Transmissivity.  
 Homogenous, well-balanced light dispersing, no shadow.

### Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.  
 Wattage: 15 - 18 W  
 High Lumen: 120lm/w  
 3 STEP Mac Adam  
 High efficiency, low flicker driver  
 Lamp Type: COB  
 Operating Temperature: -20°C to 45°C  
 Glow Wire Test 850° C  
 Warranty : 5 Years  
 Life Time: 50,000hrs at 25°C (L80/B10)

### Fields of Application:

Retail  
 Galleries hotels  
 Living spaces  
 Conference rooms  
 Counters  
 Restaurants

### Installation Method:

Recessed Mounting Adjustable

|            |   |          |          |         |                         |
|------------|---|----------|----------|---------|-------------------------|
| Wattage(W) | : | 15       | 18       |         |                         |
| Finish     | : | White(W) | Black(B) | Gray(G) |                         |
| Kelvin*    | : | 3000K    | 4000K    |         |                         |
| Beam Angle | : | 15°      | 24°      | 36°     |                         |
| CRI        | : | 80+      | 90+      |         |                         |
| Driver     | : | ON/OFF   | 0/1-10V  | DALI    | Phase Dimming Bluetooth |


\*Special Color & Finish on request

### Product Code (96811618.60):

| Wattage | Lumens(lm) | Dimension(LxWxH) mm | Cut out (mm) |
|---------|------------|---------------------|--------------|
| 15      | 1800LM     | 116x116x127         | 103x103      |
| 18      | 2160LM     | 116x116x127         | 103x103      |

\*Luminous flux value is calculated for 4000K CRI>80

### Photometric:

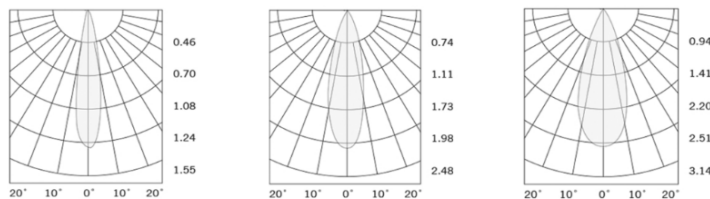

### Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96811618.60 30K 15D 8 1 W

| CCT         | Beam Angle | CRI   | Driver            | Finish  |
|-------------|------------|-------|-------------------|---------|
| 30K - 3000K | 15D - 15°  | 8->80 | 1 - ON/OFF        | W-White |
| 40K - 4000K | 24D - 24°  | 9->90 | 2 - 0/1-10V       | B-Black |
|             | 36D - 36°  |       | 3 - DALI          | G-Gray  |
|             |            |       | 4 - Phase Dimming |         |
|             |            |       | 5 - Bluetooth     |         |

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C