



RIVO



Features:

RIVO is recessed adjustable downlight, die cast aluminum body.
 Simple and easy appearance, in line with contemporary aesthetic concept.
 Aluminum reflector for extend long service lifetime.
 High light Transmissivity.
 Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
 Wattage: 2X15 - 2X18 W
 High Lumen: 120lm/w
 3 STEP Mac Adam
 High efficiency, low flicker driver
 Lamp Type: COB
 Operating Temperature: -20°C to 45°C
 Glow Wire Test 850° C
 Warranty : 5 Years
 Life Time: 50,000hrs at ta 25°C
 (L80/B10)

Fields of Application:

Retail
 Galleries hotels
 Living spaces
 Conference rooms
 Counters
 Restaurants

Installation Method:

Recessed Trimless Adjustable.

Wattage(W)	:	2X15	2X18		
Finish	:	White(W)	Black(B)	Gray(G)	
Kelvin*	:	3000K	4000K	5000K	
Beam Angle	:	15°	24°	36°	
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


*Special Color & Finish on request

Product Code (96817936.40):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut out (mm)
2X15	3600LM	179x99x128	183x108
2X18	43200LM	179x99x128	183x108

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

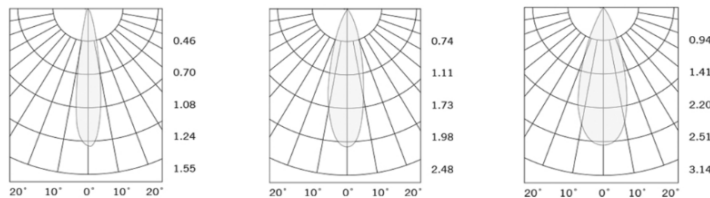

Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96817936.40 30K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	15D - 15°	8->80	1 - ON/OFF	W-White
40K - 4000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
50K - 5000K	36D - 36°		3 - DALI	G-Gray
			4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C