


## RIVO



### Features:

RIVO is recessed adjustable downlight, die cast aluminum body.  
Simple and easy appearance, in line with contemporary aesthetic concept.  
Aluminum reflector for extend long service lifetime.  
High light Transmissivity.  
Homogenous, well-balanced light dispersing, no shadow.

### Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.  
Wattage: 2x15 - 2x18 W  
High Lumen: 120lm/w  
3 STEP Mac Adam  
High efficiency, low flicker driver  
Lamp Type: COB  
Operating Temperature: -20°C to 45°C  
Glow Wire Test 850° C  
Warranty : 5 Years  
Life Time: 50,000hrs at 25°C (L80/B10)

### Fields of Application:

Retail  
Galleries hotels  
Living spaces  
Conference rooms  
Counters  
Restaurants

### Installation Method:

Recessed Adjustable.

|            |   |          |          |         |                         |
|------------|---|----------|----------|---------|-------------------------|
| Wattage(W) | : | 2x15     | 2x18     |         |                         |
| Finish     | : | White(W) | Black(B) | Gray(G) |                         |
| Kelvin*    | : | 3000K    | 4000K    | 5000K   |                         |
| Beam Angle | : | 15°      | 24°      | 36°     |                         |
| CRI        | : | 80+      | 90+      |         |                         |
| Driver     | : | ON/OFF   | 0/1-10V  | DALI    | Phase Dimming Bluetooth |


\*Special Color & Finish on request

### Product Code (96819636.60):

| Wattage | Lumens(lm) | Dimension(LxWxH)<br>mm | Cut out  (mm) |
|---------|------------|------------------------|----------------------------------------------------------------------------------------------------|
| 2x15    | 3600LM     | 196x116x127            | 183x103                                                                                            |
| 2x18    | 4320LM     | 196x116x127            | 183x103                                                                                            |

\*Luminous flux value is calculated for 4000K CRI>80

### Photometric:

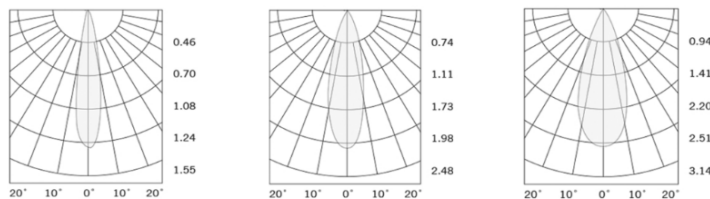

### Standards

- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96819636.60 30K 15D 8 1 W

| CCT         | Beam Angle | CRI   | Driver            | Finish  |
|-------------|------------|-------|-------------------|---------|
| 30K - 3000K | 15D - 15°  | 8->80 | 1 - ON/OFF        | W-White |
| 40K - 4000K | 24D - 24°  | 9->90 | 2 - 0/1-10V       | B-Black |
| 50K - 5000K | 36D - 36°  |       | 3 - DALI          | G-Gray  |
|             |            |       | 4 - Phase Dimming |         |
|             |            |       | 5 - Bluetooth     |         |

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C