

RIVO



Features:

RIVO is recessed adjustable downlight, die cast aluminum body .
Simple and easy appearance, in line with contemporary aesthetic concept.
Aluminum reflector for extend long service lifetime.
High light Transmissivity.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 3x15 - 3x18W
High Lumen: 120lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty : 5 Years
Life Time: 50,000hrs at ta 25°C
(L80/B10)

Fields of Application:

Retail
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants

Installation Method:

Recessed Adjustable

Wattage(W)	:	3x15	3x18	
Finish	:	White(W)	Black(B)	Gray(G)
Kelvin*	:	3000K	4000K	5000K
Beam Angle	:	15°	24°	36°
CRI	:	80+	90+	
Driver	:	ON/OFF	0/1-10V	DALI Phase Dimming Bluetooth


*Special Color & Finish on request

Product Code (96827554.60):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut out  (mm)
3x15	4320LM	275x116x127	263x103
3x18	5400LM	275x116x127	263x103

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

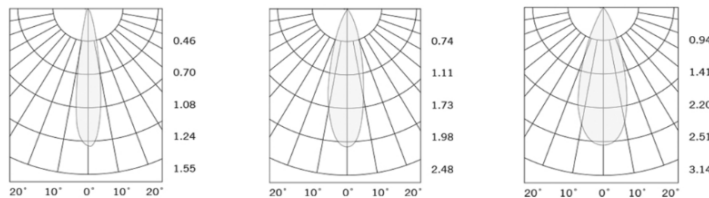

Standards

EN 60598-1
EN 60598-2-2
EN 60598-2-22
EN 60598-3-2
EN 60598-3-3

Order Code Ex: 96827554.60 30K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	15D - 15°	8->80	1 - ON/OFF	W-White
40K - 4000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
50K - 5000K	36D - 36°		3 - DALI	G-Gray
			4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C