

## ROPE



### Features:

ROPE 130lm/W Slim Panel , Aluminum Body frame , Highly Efficient Power coated, Non - Yellowing Opal Diffuser.

It can be mounted in ceiling recessed, surface mounted and suspended as per requirements. Different frame designs and colors are available, Easy and various installation styles.

Dimmable compatible with Dali, Lighting sensors and Motion sensors optional Emergency battery pack last for 3 hours.

### Technical Specifications:

Input Voltage : 220- 240V AC, 50 Hz.

Wattage : 20-40W

High Efficacy : 130lm/w

3 STEP Mac Adam

High efficiency, low Flicker driver

UGR >19

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty : 5 Years

Life Time : 50,000hrs at ta 25°C (L80/B10)

### Fields of Application:

Offices / Restaurants

Hotels / Shops



School/ Hospital

Hallway/ lobbies

Meeting Rooms

### Installation Method:

Recessed

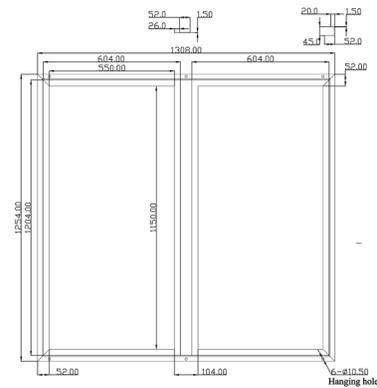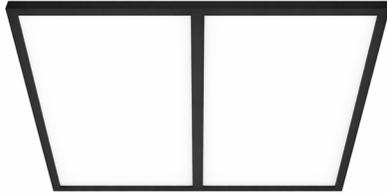

Wattage(W)	:	15	20	30	35	40
Finish	:	White(W)	Black(B)			
Kelvin*	:	3000K	3500K	4000K	5000K	5700K 6500K
Beam Angle	:	90°	120°			
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


\*Special Color & Finish on request

### Product Code (96625440):

Wattage	Lumens(lm)	Dimension(LxWxH) mm
15	1,950LM	1254x600x52
20	2,600LM	1254x600x52
30	3,900LM	1254x600x52
35	4,550LM	1254x600x52
40	5,200LM	1254x600x52

\*Luminous øux value is calculated for 4000K CRI>80

### Photometric:

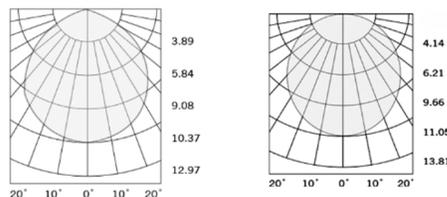

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

**Standards**

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96625440 30K 90D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	90D - 90°	8->80	1 - ON/OFF	W-White
35K - 3500K	120D - 120°	9->90	2 - 0/1-10V	B-Black
40K - 4000K			3 - DALI	
50K - 5000K			4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	
65K - 6500K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C