

ROSSI



Features:

ROSSI is Recessed Downlight, expertly crafted from premium aluminum and finished with a solvent-free powder coating to ensure long-lasting durability and resistance to wear, with PMMA Lens source to shape, control, and direct the beam of light and mounting module, interchangeable.

The fixture structure ensures UGR < 19, delivering comfortable, glare-controlled lighting.

The most classic and practical lamps, super versatile.

For enhanced customization, various CRI (Color Rendering Index) and CCT (Correlated Color Temperature) options are available upon request, allowing designers to create the perfect lighting atmosphere.

Structural supports and reflector combination of refined design, advanced optics.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50/60Hz.

Wattage: 7-9W

Efficiency: 80lm/W

High efficiency, low flicker driver

3 STEP Mac Adam

Lamp Type: COB

Chip Brand: CREE / Bridgelux

Driver Brand: VS / OSRAM / Tridonic

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L85/B10).

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Museums

Restaurants

Painting Exhibitions

Theaters

Installation Method:


Recessed.

Wattage(W)	:	7	9				
Finish	:	White(W)	Black(B)				
Kelvin*	:	2700K	3000K	3500K	4000K	5000K	5700K
		6500K	Tunable White				
Beam Angle	:	15°	22°	37°	49°		
CRI	:	80+	90+				
Driver	:	ON/OFF	DALI	0/1-10V	TRIAC	Casambi	
						*Special Color and Finish on request	

Product Code (96806509):

Wattage	Lumens(lm)	Dimension (ØxH) mm	Cut Out  (mm)
7	560LM	65x90	55
9	720LM	65x90	55

*Luminous flux value is calculated for 3000K CRI>90, 3 STEP Mac Adam

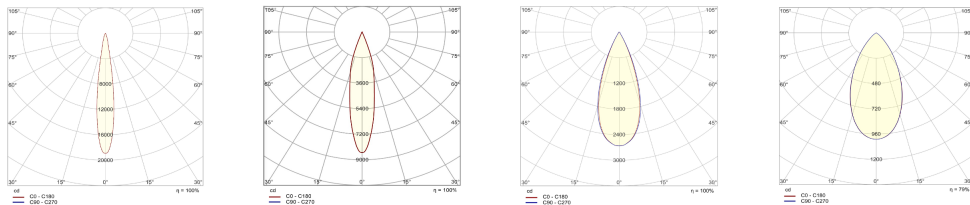

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96806509 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8-	1 - ON/OFF	W-
30K - 3000K	22D - 22°	>80	2 - DALI	White
35K - 3500K	37D - 37°	9-	3 - 0/1-10V	B-Black
3500K	49D - 49°	>90	4 - TRIAC	
40K - 4000K			5 -	
50K - 5000K			Casambi	
57K - 5700K				
65K - 6500K				
TuK - Tunable White				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C