


ROSSI

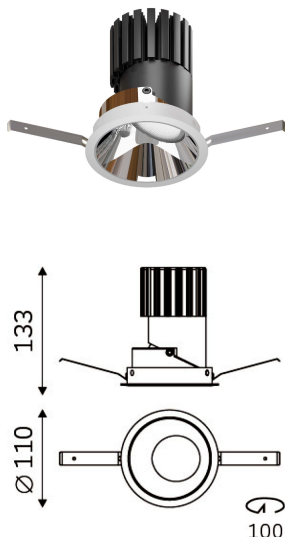

Features:

ROSSI is Recessed Wall Washer Downlight, expertly crafted from premium aluminum and finished with a solvent-free powder coating to ensure long-lasting durability and resistance to wear, with PMMA Lens source to shape.

The Product can be Tilted 22° Beam 52°.

The fixture structure ensures UGR < 19, delivering comfortable, glare-controlled lighting.

The most classic and practical lamps, super versatile.

For enhanced customization, various CRI (Color Rendering Index) and CCT (Correlated Color Temperature) options are available upon request, allowing designers to create the perfect lighting atmosphere.

Structural supports and reflector combination of refined design, advanced optics.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50/60Hz.

Wattage: 20-28W

Efficiency: 70lm/W

High efficiency, low flicker driver

3 STEP Mac Adam

Lamp Type: COB

Chip Brand: CREE / Bridgelux

Driver Brand: VS / OSRAM / Tridonic

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L85/B10).

Fields of Application:

Retail
Education
Galleries hotels
Living spaces
Museums
Restaurants
Painting Exhibitions
Theaters

Installation Method:

Recessed.

Wattage(W)	:	20	25	28			
Finish	:	White(W)	Black(B)				
Kelvin*	:	2700K	3000K	3500K	4000K	5700K	6500K
Beam Angle	:	52°					
CRI	:	80+	90+				
Driver	:	ON/OFF	DALI	Phase Dimming	1-10V		

*Special Color and Finish on request

Product Code (96811028'W):

Wattage	Lumens(lm)	Dimension (ØxH) mm	Cut Out  (mm)
20	1400LM	110x133	75
25	1750LM	110x133	75
28	1960LM	110x133	75

*Luminous flux value is calculated for 3000K CRI>90, 3 STEP Mac Adam

EN 60598-1
EN 60598-2-2
EN 60598-2-22
EN 60598-3-2
EN 60598-3-3

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K 30K - 3000K 35K - 3500K 3500K 40K - 4000K 57K - 5700K 65K - 6500K	52D - 52°	<->80<->90	1 - ON/OFF2 - DALI3 - Phase Dimming4 - 1-10V	W- White B- Black

Pluxb Lighting d.o.o
Miklavška cesta 75, SI - 2311 Hoče, SLOVENIA

www.pluxb.com