


## SAGA



### Features:

SAGA series is Recessed Spotlight is designed to deliver high-quality lighting with a clean and discreet appearance.

High quality of die cast aluminum body with Opal Diffuser, frosted glass diffuser for soft and even light distribution available upon request.

Product has the structure and appearance Ensures UGR<19.

High light Transmissivity.

Homogenous, well-balanced light dispersing, no shadow.

### Technical Specifications:

Input Voltage: 220- 240V AC,60/50 Hz.

Wattage: 20-25W

Efficiency: 108lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: 2835 SMD LED

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty : 5 Years

Life Time : 50,000hrs at ta 25°C

(L80/B10)

### Fields of Application:

Retail

Education

Galleries hotels

Living spaces

### Installation Method:

Recessed

Wattage(W)	:	20	22	25		
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	15°	24°	36°		
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


\*Special Color & Finish on request

### Product Code (96712325):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out (mm)
20	2160LM	123x68	110
22	2376LM	123x68	110
25	2700LM	123x68	110

\*Luminous flux value is calculated for 4000K CRI>80

### Photometric:

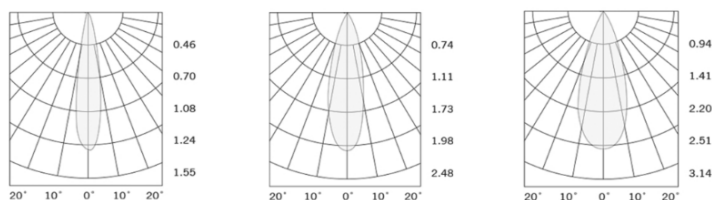

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96712325 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	
50K - 5000K			4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C