


## SAIL



### Features:

SAIL is Recessed Trimless downlight made of Die cast CNC aluminum with different RAL Finish White (RAL9003) / Grey (RAL9006) / Black (RAL9005), Solvent Free Power Coating, PMMA optic.

It has good quality reflector.

Sealed protective cover is dustproof, and waterproof and moisture proof.

Product has the structure and appearance Ensures UGR<16.

Minimalist appearance, different reflectors offer different options according to different needs.

### Technical Specifications:

Input Voltage: 220- 240 V AC, 60/50

Hz.

Wattage: 25W

High Lumen: 90lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at ta 25°C

(L80/B10)

### Fields of Application:

Retail

Education

Galleries hotels

Living spaces

### Installation Method:

Recessed Trimless.

Wattage(W)	25					
Finish	White(W)	Black(B)	Gray(G)			
Kelvin*	2700K	3000K	4000K	5000K	6000K	Tunable
Beam Angle	15°	24°	36°	50°		
CRI	90+	95+				
Driver	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth	


\*Special Color and Finish on request

### Product Code (96810025.10):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out (mm)
25	2250LM	100x115	80

\*Luminous flux value is calculated for 4000K CRI>90

### Photometric:

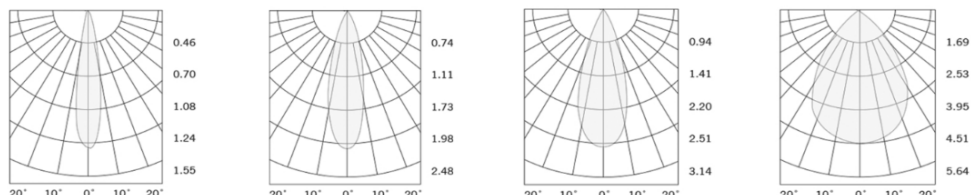

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

## Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96810025.10 27K 15D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	9->90	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->95	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	G-Gray
50K - 5000K	50D - 50°		4 - Phase Dimming	
60K - 6000K			5 - Bluetooth	
TuK - Tunable				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C