

SAMAH



Description:

SAMAH is an outdoor up-down light or down light wall lamp with special optical design. The design is simple and rich in texture. It is composed of die-casting aluminum and tempered glass. The high-quality outdoor special powder coating process is adopted to make the lamp have strong weather resistance and anti-aging function.

Use aluminum light barriers to adjust light distribution.

There are three light distribution modes of direct light, direct light + indirect light, and indirect light to choose from, which can meet the needs of various scenes.

The lamp is suitable for indoor and outdoor facade lighting architectural decorative lighting, etc.

Product Specifications:

- Housing : Die cast Aluminium
- Glass : Tempered Glass
- Diffuser : Clear Glass
- Coating : Powder Coating
- Gasket: Moulding shaped silicone seal
- Lens/Reflector : Optical lens (efficiency>90%)
- Power Cable: 0.5 mt. power cable included
- Driver : High efficiency, low flicker driver
- Installation Type: Surface mounted
- Adjustable: Yes

Technical Specifications:

- Wattage: 6-20W
- Voltage: 220-240VAC
- Frequency: 50-60Hz
- Light Source: OSRAM/EPISTAR/CREE
- Lumen: 70lm/W
- Mac Adam: 3 Step
- Safety Class: I
- Working Temperature:-20°C to 50°C
- Life Time: 50,000hrs (L80/B10) at 25°C
- Warranty: 5 Years

Parameter:

Wattage(W)	:	6W / 10W / 20W
Finish	:	Black (B) / Customized (C)
Kelvin*	:	2700K / 3000K / 4000K / 6000K
Beam Angle	:	Asymmetric
CRI	:	80
Control Mode	:	ON/OFF / DALI / 0 / 1-10V
Type	:	Type A / Type B / Type C / Type D / Type E

Standards :

- EN 60598-1
- EN 60598-2-2
- EN 60598-3-2
- EN 60598-3-3


Order Code:

Product Code	Wattage	CCT	Voltage	Beam Angle	Finish	Control Mode
540102	06 - 06W (2*3W)	27-2700K	A-220-240VAC	AS - Asymmetric	B-Black	1-ON/OFF
	10 - 10W	30-3000K			C-Customized	2-DALI
	20 - 20W (2*10W)	40-4000K				3-0/1-10V
		60-6000K				


Ex: Order Code: 5401020627A'ASB1

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C


Type :

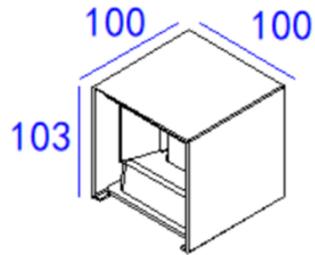


Type A
Up-down light
Wattage : 6W (2*3W)

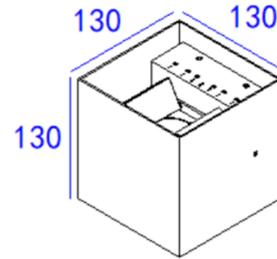


Type B
Up-down light
Wattage : 20W (2*10W)

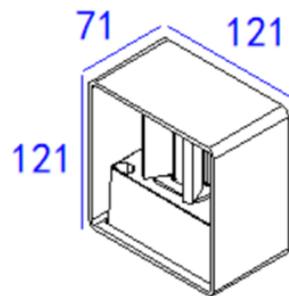

Type C
Up-down light
Wattage : 6W (2*3W)

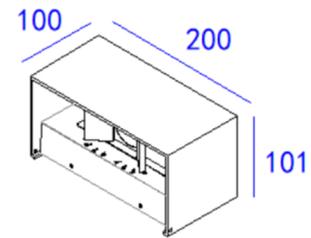

Type D
Down light or Up-down light
Wattage : 10W or 20W (2*10W)

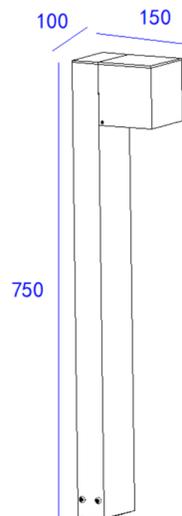

Type E
Bollard light
Wattage : 6W

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C