

SEORI



Features:

The SEORI Waterproof downlights, Die-Aluminum Body, Aluminum outer ring with small steps, reducing the glare rating.

Transparent glass cover with rubber ring for water and dust protection, high light transmittance.

Silver reflector with a wide distribution of 120° beam Easy to do the recessed installation.

High light Transmissivity.

Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.

Wattage: 10-15W

High Lumen: 120lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850" C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail

Galleries hotels

Living spaces

Conference rooms

Counters

Restaurants

Installation Method:

Recessed.

| | | | | | | |
|------------|---|----------|----------|-------|---------------|-----------|
| Wattage(W) | : | 10 | 15 | | | |
| Finish | : | White(W) | Black(B) | | | |
| Kelvin* | : | 2700K | 3000K | 4000K | 5700K | 6500K |
| Beam Angle | : | 60° | 120° | | | |
| CRI | : | 80+ | 90+ | | | |
| Driver | : | ON/OFF | 0/1-10V | DALI | Phase Dimming | Bluetooth |


*Special Color & Finish on request

Product Code (97811015):

| Wattage | Lumens(lm) | Dimension(L x W) mm | Cut Out (mm) |
|---------|------------|---------------------|--------------|
| 10 | 1200LM | 110x110 | 100 |
| 15 | 1800LM | 110x110 | 100 |

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

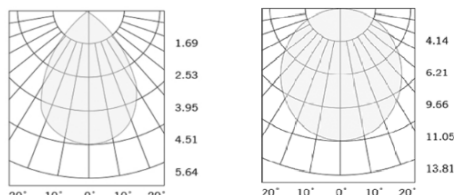

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 97811015 27K 60D 8 1 W

| CCT | Beam Angle | CRI | Driver | Finish |
|-------------|-------------|-------|-------------------|---------|
| 27K - 2700K | 60D - 60° | 8->80 | 1 - ON/OFF | W-White |
| 30K - 3000K | 120D - 120° | 9->90 | 2 - 0/1-10V | B-Black |
| 40K - 4000K | | | 3 - DALI | |
| 57K - 5700K | | | 4 - Phase Dimming | |
| 65K - 6500K | | | 5 - Bluetooth | |