



SHOWLITE



Features:

SHOWLITE Is Recessed adjustable downlight, made of die cast aluminum body and finished with a solvent-free powder coating to ensure long-lasting durability and resistance to wear. It features a customized anti-glare reflector that supports multiple beam angles, delivering exceptional flexibility in light distribution to meet diverse lighting design needs with its compact body and high-power output.

Available options color with Matt White, Matt Black or Chrome.

Its discreet design allows for seamless integration into any architectural setting, while offers precise directional lighting, enabling focused illumination exactly where it is needed.

Product has the structure and appearance Ensures UGR<19, delivering excellent visual comfort.

For enhanced customization, various CRI and CCT options are available upon request, allowing designers to create the perfect lighting atmosphere.

It offers discreet installation, focused beam control, and high visual comfort for professional lighting applications.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50/60Hz.

Wattage: 3.5W

Efficiency: 100lm/W

High efficiency, low flicker driver

3 STEP Mac Adam

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Lifetime 50,000hrs at a 25°C(L90/B10)

Fields of Application:

- Retail
- Education
- Galleries hotels
- Living spaces
- Museums
- Restaurants
- Painting Exhibitions
- Theaters

Installation Method:

Recessed Adjustable

Wattage(W)	:	3.5				
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	3500K	4000K	5700K
Beam Angle	:	28°	34°	37°	53°	
CRI	:	90+	95+			
Driver	:	ON/OFF	DALI	Phase Dimming	1-10V	


*Special Color and Finish on request

Product Code (96805503.50):

Wattage	Lumens(lm)	Dimension (ØxH) mm	Cut Out (mm)
3.5	350LM	55x31	50

*Luminous flux value is calculated for 4000K CRI>90, 3 STEP Mac Adam

Photometric:

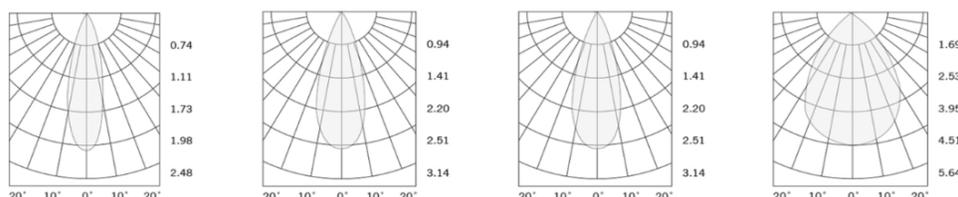

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96805503.50 27K 28D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	28D - 28°	9-	1 - ON/OFF	W-
30K - 3000K	34D - 34°	>90	2 - DALI	White
35K - 3500K	37D - 37°	9-	3 - Phase	B-Black
40K - 4000K	53D - 53°	>95	Dimming	
57K - 5700K			4 - 1-10V	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C