


SILU



Features:

Silu is Decorative light, modern-style track light designed not only to provide high quality lighting but also to enhance the aesthetic appeal of any space.

Made of die cast aluminum body which is light-weight, durable.

Excellent for heat dissipation, which helps the light last longer.

Available in various color temperatures (cool white, warm white, etc), along with PMMA

Diffuser is used to cover the leds, reduces glare, making the light softer on the eye.

Track System Compatibility Track 3 phase 4 wire and 6 phase 5 wire.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 25-30W

High Lumen: 100lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: 2835 SMD LED

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at ta 25°C

(L80/B10)

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Installation Method:

On an electrified track or special base.

Wattage(W)	:	25	30		
Finish	:	White(W)	Black(B)	Gray(G)	
Kelvin*	:	2700K	3000K	3500K	4000K
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Casambi


*Special Color and Finish on request

Product Code (96528330):

Wattage	Lumens(lm)	Dimension(LxWxH) mm
25	1000LM	283x45x121
30	3000LM	283x45x121

*Luminous Lux value is calculated for 4000K and CRI>90

Photometric:

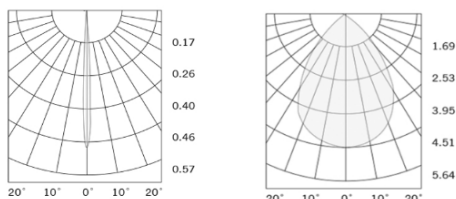

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: ~~96528330~~ 27K 8 1 W

CCT	CRI	Driver	Finish
27K - 2700K	8->80	1 - ON/OFF	W-White
30K - 3000K	9->90	2 - 0/1-10V	B-Black
35K - 3500K		3 - DALI	G-Gray
40K - 4000K		4 - Phase Dimming	
		5 - Casambi	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C