


SKEW

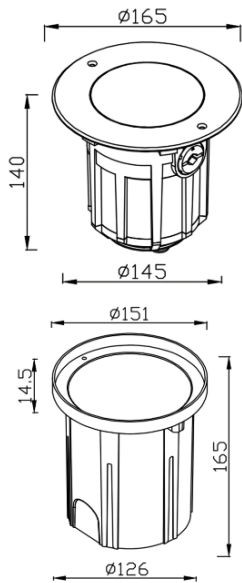

Description:

SKEW is asymmetric reflector Inground light typically feature durable, weather-resistant housings suitable for outdoor use. Excellent heat dissipation.

It include features such as corrosion resistance , dustproof, anodized and polished, sand blasted, not easy to rust and fade.

Toughened glass surface, with high hardness, not easy to break.

It comes with different CCT sources and various beam angles this family is a perfect solution to the requirement.

It has very wide application like For landscape lighting, garden lighting, horticultural engineering design, public fountain square Lighting.

Product Specifications:

Front cover : Stainless Steel 316 SUS
 Housing : Die cast aluminum grey
 Coating: Powder Coating
 Glass : Tempered glass
 Gasket: Molding shaped silicone seal
 Lens/Reflector : Optical lens (efficiency>90%)
 Power Cable: 0.5 mt. power cable included
 Driver : High efficiency, low flicker driver
 Installation Type: Inground
 Adjustable: Yes

Technical Specifications:

Wattage:20W
 Voltage: DC24V / 220-240V AC
 Frequency: 50-60Hz
 Light Source: OSRAM/EPISTAR/CREE
 Lumen: 100lm/W
 Mac Adam: 3 Step
 Safety Class: III / II
 Working Temperature:-20°C to 55°C
 Life Time: 50,000hrs (L80/B10) at 35°C
 Warranty: 5 Years

Parameter:


Wattage(W)	:	20W
Finish	:	Stainless Steel 316 SUS (SS)
Kelvin*	:	2700K/ 3000K / 4000K / 6000K
Beam Angle	:	10° / 25° / 45° / 60° / Asymmetric
CRI	:	80
Control Mode	:	ON/OFF / DALI / 0 / 1-10V / Phase Cut / DMX

Order Code:

Product Code	Wattage	CCT	Voltage(DC)	Beam Angle	Finish	Control Mode
544164	20C-20W COB	27-2700K	D-24VDC	10 - 10°	SS-Stainless Steel 316	1-ON/OFF
		30-3000K		25 - 25°		2-DALI
		40-4000K		45 - 45°		3-0/1-10V
		60-6000K		60 - 60°		4-Phase cut
		AS-Asymmetric		5-DMX		

Ex: Order Code: 54416420C27D'10SS1

Photometric :



Standard:

- EN 60598-1
- EN 60598-2-2
- EN 60598-3-2
- EN 60598-3-3

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Product Code	Wattage	CCT	Voltage(AC)	Beam Angle	Finish	Control Mode
544164	20C-20W COB	27-2700K	A-220-240VAC	10 - 10°	SS-Stainless Steel 316	1-ON/OFF
		30-3000K		25 - 25°		2-DALI
		40-4000K		45 - 45°		3-0/1-10V
		60-6000K		60 - 60°		4-Phase cut
				AS-Asymmetric		5-DMX

Ex: Order Code: 54416420C27A10SS1

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C