


SKY

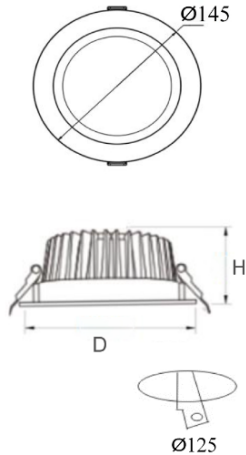

Features:

Sky Downlight Die Cast Aluminum body, black solvent free power coating.
 Excellent heat dissipation with aluminum outer ring matt black/white finished.
 Polycarbonate frosted cover, Anti-UV and Anti-yellow changing.
 Osram SMD2835 with a great thermal conductivity.
 Spring Clips Metal body, strongest strength, Easy to do the recessed installation.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
 Wattage: 10 - 15 W
 High Lumen: 105lm/W
 3 STEP Mac Adam
 High efficiency, low flicker driver
 Lamp Type: SMD
 Operating Temperature: -25°C to +50°C
 Glow Wire Test 850°C
 Warranty: 5 Years
 Life Time: 50,000hrs at ta 25°C
 (L80/B10)

Fields of Application:

Retail
 Galleries hotels
 Living spaces
 Conference rooms
 Counters
 Restaurants

Installation Method:

Recessed

Wattage(W)	:	10	15			
Finish	:	White(W)	Black(B)			
Kelvin*	:	3000K	4000K	5000K	5700K	6500K
Beam Angle	:	120°				
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color & Finish on request

Product Code (96814515):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out (mm)
10	1050LM	145X62	125
15	1575LM	145X62	125

*Luminous flux value is calculated for 4000K CRI>80

Photometric:



Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96814515 30K 120D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	120D - 120°	8->80	1 - ON/OFF	W-White
40K - 4000K		9->90	2 - 0/1-10V	B-Black
50K - 5000K			3 - DALI	
57K - 5700K			4 - Phase Dimming	
65K - 6500K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C