

## SKY



### Features:

- Sky Downlight Die Cast Aluminum body, black solvent free power coating.
- Excellent heat dissipation with aluminum outer ring matt black/white finished.
- Polycarbonate frosted cover, Anti-UV and Anti-yellow changing.
- Osram SMD2835 with a great Thermal conductivity.
- Spring Clips Metal body, strongest strength, Easy to do the recessed installation.

### Technical Specifications:


- Input Voltage: 220-240 V AC, 50 Hz.
- Wattage: 25 - 30 W
- High Lumen: 105lm/W
- 3 STEP Mac Adam
- High efficiency, low flicker driver
- Lamp Type: SMD
- Operating Temperature: -25°C to +50°C
- Glow Wire Test 850°C
- Warranty: 5 Years
- Life Time: 50,000hrs at ta 25°C (L80/B10)

### Fields of Application:

- Retail
- Galleries hotels
- Living spaces
- Conference rooms
- Counters
- Restaurants

### Installation Method:

Recessed

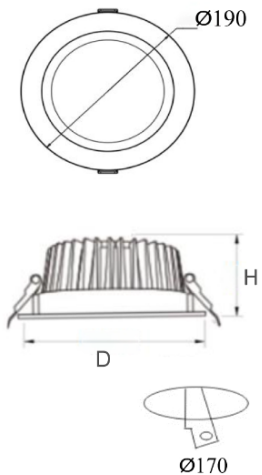

Wattage(W)	:	25	30			
Finish	:	White(W)	Black(B)			
Kelvin*	:	3000K	4000K	5000K	5700K	6500K
Beam Angle	:	120°				
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


\*Special Color & Finish on request

### Product Code (96819030):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out (mm)
25	2625LM	190X62	170
30	3150LM	190X62	170

\*Luminous flux value is calculated for 4000K CRI>80

### Photometric:



Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

## Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96819030 30K 120D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	120D - 120°	8->80	1 - ON/OFF	W-White
40K - 4000K		9->90	2 - 0/1-10V	B-Black
50K - 5000K			3 - DALI	
57K - 5700K			4 - Phase Dimming	
65K - 6500K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C