


SKY

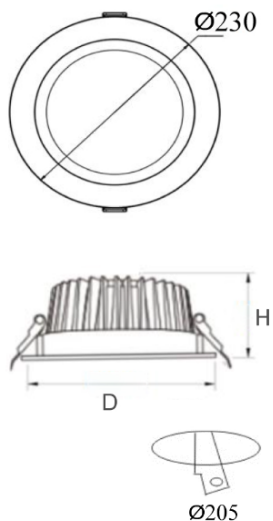

Features:

Sky Downlight Die Cast Aluminum body, black solvent free power coating.
Excellent heat dissipation with aluminum outer ring matt black/white finished.
Polycarbonate frosted cover, Anti-UV and Anti-yellow changing.
Osram SMD2835 with a great thermal conductivity.
Spring Clips Metal body, strongest strength, Easy to do the recessed installation.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 32 - 40 W
High Lumen: 105lm/W
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: SMD
Operating Temperature: -25°C to +50°C
Glow Wire Test 850°C
Warranty: 5 Years
Life Time: 50,000hrs at ta 25°C (L80/B10).

Fields of Application:

Retail
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants

Installation Method:

Recessed.

Wattage(W)	:	32	35	40		
Finish	:	White(W)	Black(B)			
Kelvin*	:	3000K	4000K	5000K	5700K	6500K
Beam Angle	:	120°				
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color & Finish on request

Product Code (96823040):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out (mm)
32	3360LM	230X75	205
35	3675LM	230X75	205
40	4200LM	230X75	205

*Luminous flux value is calculated for 4000K CRI>80

Photometric:



Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: <u>96823040</u> <u>30K</u> <u>120D</u> <u>8</u> <u>1</u> <u>W</u>				
CCT	Beam Angle	CRI	Driver	Finish
30K - 3000K	120D - 120°	8->80	1 - ON/OFF	W-White
40K - 4000K		9->90	2 - 0/1-10V	B-Black
50K - 5000K			3 - DALI	
57K - 5700K			4 - Phase Dimming	
65K - 6500K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C