



SNOW



Features:

SNOW is simple and easy appearance, in line with contemporary aesthetic concept.
Aluminum Die-cast body with Excellent thermal property, Solvent Free Power Coating with RAL 9003, RAL 9005.
High reflectance aluminum reflector
Reflectors with Matt White, Matt Black, Chrome, Silver, Bronze and other special finish on request, and with Optical accessories Honeycomb, Spread Optics, Solite Optics.
The spot transition uniform and full without residual light.
High light Transmissivity.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 8-12W
High Lumen: 100 lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at 25°C
(L80/B10).

Fields of Application:

Retail
Education
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants

Installation Method:

Recessed Adjustable

Wattage(W)	:	8	12			
Finish	:	White(W)	Black(B)	Chrome(C)		
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	20°	30°	40°	50°	
CRI	:	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color and Finish on request

Product Code (96806512.50):

Wattage	Lumens(lm)	Dimension(Øx H) mm	Cut out  (mm)
8	800LM	65x105	58
12	1200LM	65x105	58

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

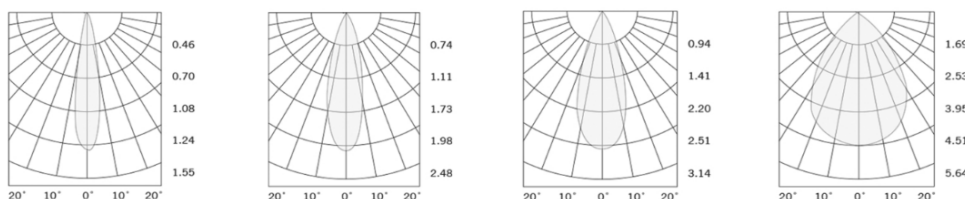

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: ~~96806512.50~~ 27K 20D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	20D - 20°	9->90	1 - ON/OFF	W-White
30K - 3000K	30D - 30°		2 - 0/1-10V	B-Black
40K - 4000K	40D - 40°		3 - DALI	C-Chrome
50K - 5000K	50D - 50°		4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C