


SNOW

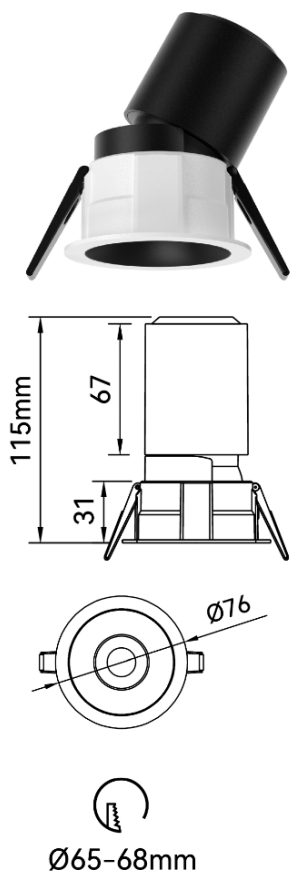

Features:

SNOW is simple and easy appearance, in line with contemporary aesthetic concept.
Aluminum Die-cast body with Excellent thermal property, Solvent Free Power Coating with RAL 9003, RAL 9005.
High reflectance aluminum reflector
Reflectors with Matt White, Matt Black, Chrome, Silver, Bronze and other special finish on request, and with Optical accessories Honeycomb, Spread Optics, Solite Optics.
The spot transition uniform and full without residual light.
High light Transmissivity.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 10-15W
High Lumen: 100lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at 25°C
(L80/B10).

Fields of Application:

Retail
Education
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants


Installation Method:

Recessed

| | | | | | | |
|------------|---|----------|----------|-----------|---------------|-----------|
| Wattage(W) | : | 10 | 15 | | | |
| Finish | : | White(W) | Black(B) | Chrome(C) | | |
| Kelvin* | : | 2700K | 3000K | 4000K | 5000K | 5700K |
| Beam Angle | : | 18° | 24° | 36° | 50° | |
| CRI | : | 90+ | | | | |
| Driver | : | ON/OFF | 0/1-10V | DALI | Phase Dimming | Bluetooth |


*Special Color and Finish on request

Product Code (96807615.50):

| Wattage | Lumens(lm) | Dimension(Øx H) mm | Cut out  (mm) |
|---------|------------|--------------------|--|
| 10 | 1000LM | 76x115 | 68 |
| 15 | 1500LM | 76x115 | 68 |

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

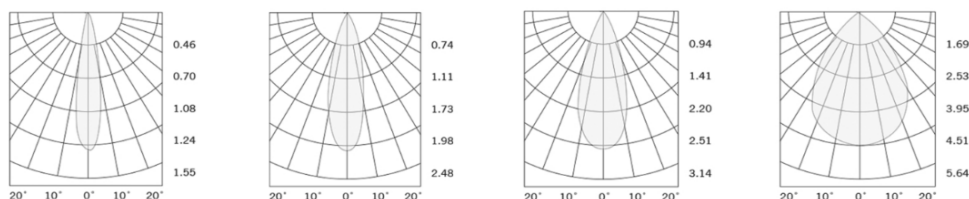

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96807615.50 27K 18D 9 1 W

| CCT | Beam Angle | CRI | Driver | Finish |
|-------------|------------|-------|-------------------|----------|
| 27K - 2700K | 18D - 18° | 9->90 | 1 - ON/OFF | W-White |
| 30K - 3000K | 24D - 24° | | 2 - 0/1-10V | B-Black |
| 40K - 4000K | 36D - 36° | | 3 - DALI | C-Chrome |
| 50K - 5000K | 50D - 50° | | 4 - Phase Dimming | |
| 57K - 5700K | | | 5 - Bluetooth | |

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C