


SOWAR'R

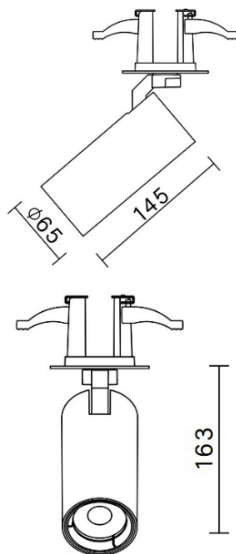

Features:

SOWAR Recessed Adjustable Downlight with die-cast aluminum body with heat dissipation. Modern kind design with easily adjust and focusable and highlight led producible or areas. Anti-glare cylinder type LED light. Easy to install and maintain. Fast and simple screw lock type metal ceiling base easy to install and maintain. High light transmissivity.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 15 W
High Lumen: 110lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail
Education
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants

Installation Method:

Recessed Adjustable

Wattage(W)	:	15				
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	4000K	5000K	6000K 6500K
Beam Angle	:	15°	24°	36°	60°	
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color & Finish on request

Product Code (96806515.50'R):

Wattage	Lumens(lm)	Dimension(ØxH) mm
15	1650LM	65x145

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

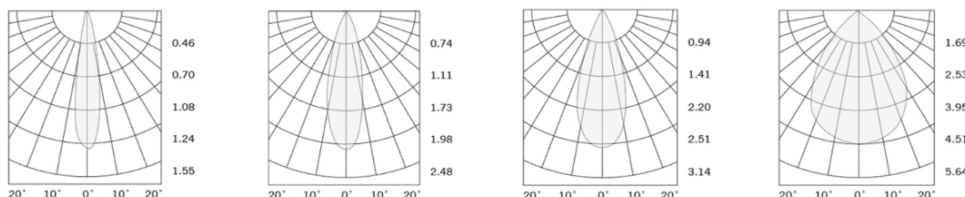

Standards

EN 60598-1
EN 60598-2-2
EN 60598-2-22
EN 60598-3-2
EN 60598-3-3

Order Code Ex: 96806515.50'R 27K 15D & 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	
50K - 5000K	60D - 60°		4 - Phase Dimming	
60K - 6000K			5 - Bluetooth	
65K - 6500K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C