



TACLO



Suitable Accessories



Features:

TACLO Surface Downlight, classic appearance, simple, durable and practical, made of high-quality die Cast Aluminum body and solvent free power coated, with PMMA Lens

The product also available with a range of accessories, including a honeycomb louvre for superior glare control, linear spread glass for elongated light distribution, and clear glass for maximum output and clarity.

Beam Angle available in narrow, medium, and wide beam angles to provide flexibility in light distribution depending on the project requirements.

Other CRI and CCT options are available on request.

This combination of refined design, advanced optics.

High light Transmissivity.

Homogenous, well-balanced, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.

Wattage: 6-9W

High Lumen: 115lm/W

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Conference rooms

Counters

Restaurants

Installation Method:

Surface Mounted.

Wattage(W)	:	6	9			
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	21°	24°	35°	45°	60°
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	


*Special Color & Finish on request

Product Code (96808409):

Wattage	Lumens(lm)	Dimension(ØxH) mm
6	690LM	84x84
9	1035LM	84x84

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

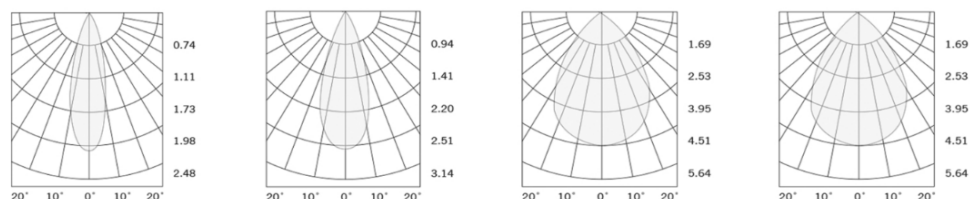

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: ~~96808409~~ 27K 21D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	21D - 21°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	35D - 35°		3 - DALI	
50K - 5000K	45D - 45°		4 - Phase Dimming	
57K - 5700K	60D - 60°			

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C