



TECO



Features:

TECO is waterproof Recessed Adjustable cylinder downlight, a sleek design.

Die Cast Aluminum body with solvent free power coated and PMMA Lens, high-temperature resistance, no deformation, uniform luminescence, which helps dissipate heat generated by the light source, prolonging the life of the spotlight.

High thermal conductivity double-sided aluminum substrate.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 10-15W

High Lumen: 100lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at ta 35°C

(L70/B10)

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Installation Method:

Recessed Adjustable

Wattage(W)	:	10	15			
Finish	:	White(W)	Black(B)	Gray(G)		
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	15°	24°	38°	60°	
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color and Finish on request

Product Code (96708415):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut out (⌀) mm
10	1000LM	84x80	75
15	1500LM	84x80	75

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

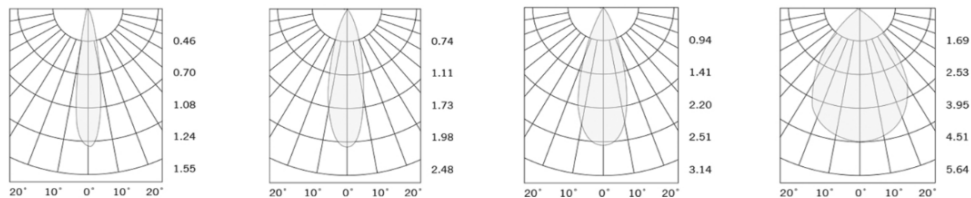

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96708415 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	38D - 38°		3 - DALI	G-Gray
50K - 5000K	60D - 60°		4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C