


TIE



Description:

TIE is a simple design wall lamp, available in square and round appearance. It features a deep anti-glare reflective cup, providing direct and indirect light with comfortable vision and no light spots.

The lamp housing is integrally die-cast aluminum, ensuring good heat dissipation.

Optional accessories (hood) and wireless intelligent dimming are available. This wall lamp is perfect for outdoor facade lighting and architectural decorative lighting and it can be used indoors as well.

Product Specifications:

Housing : Die cast Aluminium grey
Glass : Tempered Glass
Diffuser : Clear Glass
Gasket: Moulding shaped silicone seal
Lens/Reflector : Optical lens (efficiency>90%)
Power Cable: 0.5 mt. power cable included
Driver : High efficiency, low flicker driver
Installation Type: Surface mounted
Adjustable: No

Technical Specifications:

Wattage: 24-43W
Voltage: 220-240VAC
Frequency: 50-60Hz
Light Source: OSRAM/EPISTAR/CREE
Lumen: 70lm/W
Mac Adam: 3 Step
Safety Class: II
Working Temperature:-20°C to 55°C
Life Time: 50,000hrs (L80/B10) at 35°C
Warranty: 5 Years

Parameter:

Wattage(W)	:	24W / 43W
Finish	:	Black (B) / Silver (S) / Customized (C)
Kelvin*	:	3000K / 4000K
Beam Angle	:	18° / 24° / 36°
CRI	:	80
Control Mode	:	ON/OFF / DALI / 0 / 1-10V

Order Code:

Product Code	Wattage	CCT	Voltage	Beam Angle	Finish	Control Mode
540101	24-24W (2x12W)	30-3000K	A-220-240VAC	18-18°	B-Black	1-ON/OFF
	43 - 43W (2x21.5W)	40-4000K		24-24°	S-Silver	2-DALI
				36-36°	C-Customized	

Ex: Order Code: 5401012430A18B1

Accessories :



Accessories
Hood(Optional)

Standards :

EN 60598-1


EN 60598-2-2

EN 60598-3-2


EN 60598-3-3

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C


Photometric:

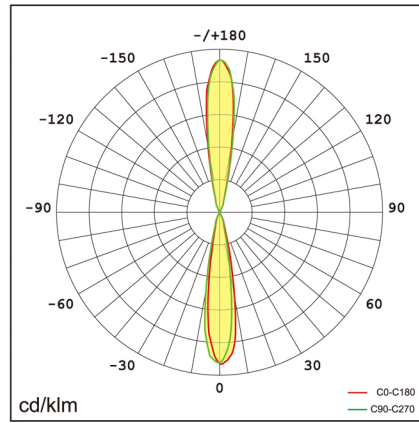

Beam Angle: 18D

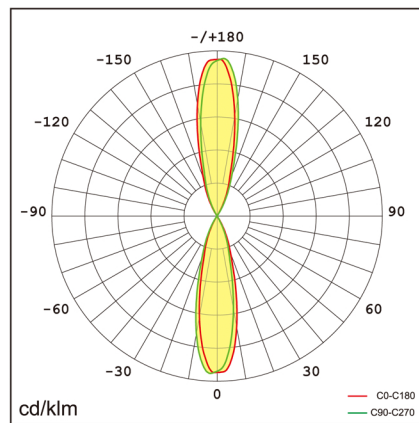

Beam Angle: 24D

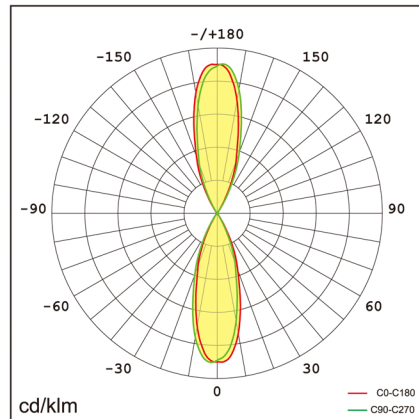

Beam Angle: 36D

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C