


TORCH



Features:

TORCH is recessed spotlight, die cast aluminum body with PMMA lens, face frame and electrostatic spraying process.

Low Height of 16mm and small dia 30mm is an ideal product where there are constraints of low ceiling .

Excellent heat dissipation, long product life and effectively reduce light ageing.

The center spot has a smooth transition to provide a soft light.

Effectively improves the luminous efficiency of lamps and lanterns, the output is more perfect.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 3 - 4 W

High Lumen: 80lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: OSRAM SMD

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at ta 25°C (L80/B10)

Fields of Application:

Retail

Galleries hotels

Living spaces

Conference rooms

Counters

Restaurants

Installation Method:

Recessed

Wattage(W)	:	3	4		
Finish	:	Stainless Steel			
Kelvin*	:	2700K	3000K	4000K	5000K
Beam Angle	:	15°	24°	36°	
CRI	:	90+	95+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming Bluetooth


*Special Color & Finish on request

Product Code (96703004):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out (mm)
3	240LM	30x16	27
4	320LM	30x16	27

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

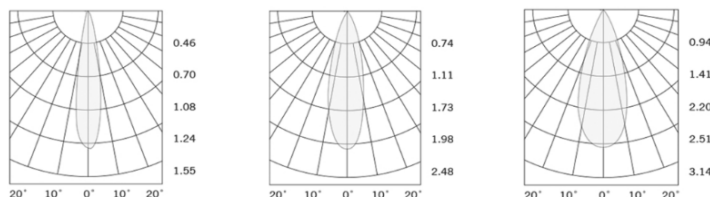

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: [96703004](#) [27K](#) [15D](#) [9](#) [1](#) [S](#)

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	9->90	1 - ON/OFF	S-Stainless Steel
30K - 3000K	24D - 24°	9->95	2 - 0/1-10V	
40K - 4000K	36D - 36°		3 - DALI	
50K - 5000K			4 - Phase Dimming	
			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C