


TUBO



Features:

TUBO Adjustable Track light for installation on mains voltage track.
High quality of die cast aluminum, for excellent dissipation and strengthen the housing surface, and PMMA Lens.
RAL 9003, RAL 9006, RAL 9005 as standard finishes other RAL finishes on request.
Universal line voltage led track lighting heads, fit in 2 Wire, 4 wires Track systems.
Adjustable Angle with 355° horizontal rotation, 90° vertical adjustment,
More accurate and professional multi-angle lighting beams.
The accessories optional Barn door, Honeycomb, Anti-Glare ring, Reflector.
The accessories are featured to reduces the sharp, direct light and softens the appearance of the light.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.
Wattage: 20W
High Lumen: 100lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at ta 25°C
(L80/B10)

Fields of Application:

Retail
Education
Galleries hotels
Living spaces

Installation Method:

On an electrified track or special base.

Wattage(W)	:	20				
Finish	:	White(W)	Black(B)	Gray(G)		
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	10°	15°	24°	36°	50°
CRI	:	90+	95+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Casambi


*Special Color and Finish on request

Product Code (96506620):

Wattage	Lumens(lm)	Dimension (ØxL) mm
20	2000LM	66x135

*Luminous Lux value is calculated for 4000K and CRI>90

Photometric:

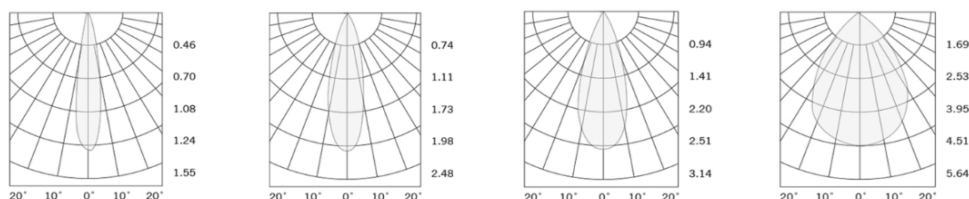

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: ~~96506620~~ 27K 10D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	10D - 10°	9->90	1 - ON/OFF	W-White
30K - 3000K	15D - 15°	9->95	2 - 0/1-10V	B-Black
40K - 4000K	24D - 24°		3 - DALI	G-Gray
50K - 5000K	36D - 36°		4 - Phase Dimming	
57K - 5700K	50D - 50°		5 - Casambi	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C