


## TULIN



### Features:

Tulin is Wall washer light, modern-style track light designed not only to provide high quality lighting but also to enhance the aesthetic appeal of any space, polarized track-mounted luminaire engineered specifically for vertical illumination with precision.

Made of die cast aluminum body which is light-weight, durable.

Excellent for heat dissipation, which helps the light last longer.

Available options color with sandy White, Sandy Black or Chrome.

Available in various color temperatures (cool white, warm white, etc), along with PMMA lens and wall washer reflector for reduces glare, making the light softer on the eye.

Professional-grade polarized optical design, ensures a clean light cut-off and minimal glare Track System Compatibility Track 3 phase 4 wire and 6 phase 5 wire.

### Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.

Wattage: 90-110W

High Lumen: 95lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB LED

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at ta 25°C

(L80/B10)

### Fields of Application:

Retail

Education

Galleries hotels

Living spaces

### Installation Method:

On an electrified track or special base.

Wattage(W)	:	45*2	50*2	55*2	
Finish	:	White(W)	Black(B)	Gray(G)	
Kelvin*	:	2700K	3000K	3500K	4000K
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming


\*Special Color and Finish on request

### Product Code (965252110):

Wattage	Lumens(lm)	Dimension(LxWxH) mm
90	8550LM	252x40x140
100	9500LM	252x40x140
110	10450LM	252x40x140

\*Luminous Lux value is calculated for 4000K and CRI>90

### Photometric:

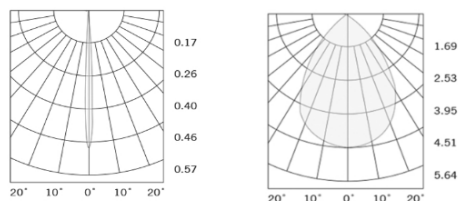

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: ~~965252110~~ 27K 8 1 W

CCT	CRI	Driver	Finish
27K - 2700K	8->80	1 - ON/OFF	W-White
30K - 3000K	9->90	2 - 0/1-10V	B-Black
35K - 3500K		3 - DALI	G-Gray
40K - 4000K		4 - Phase Dimming	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C