


UNEO



Features:

UNEO is recessed adjustable or Surface mounted adjustable, have track rail for installed methods.

Track light also has with intrack adaptor and with gear box two options.

Good quality aluminum housing and special inner construction design to achieve excellent heat dissipation, with PC Lens medium and wide beam angle available. Anti-glare reflector color option is White, Black or Chrome.

Double Spring to fixing in the other side, can be connectable.

Very flexible, any length is available, meet different places high lumen requirements.

High efficiency and uniform lighting.

Uniform spot transition without residual light.

Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.

Wattage: 30-40W

High Lumen: 105lm/w

3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: SMD LED

Operating Temperature: -20°C to 45°C

Glow Wire Test 850°C

Warranty: 5 Years

Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

- Retail
- Galleries hotels
- Living spaces
- Conference rooms
- Counters
- Restaurants

Installation Method:

Recessed / Surface Mounted.

Wattage(W)	:	30	40			
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	23°	50°			
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	


*Special Color & Finish on request

Product Code (96839340.50):

Wattage	Lumens(lm)	Dimension(LxWxH) mm
30	3150LM	393x44x102
40	4200LM	393x44x102

*Luminous flux value is calculated for 4000K CRI>90

Photometric:

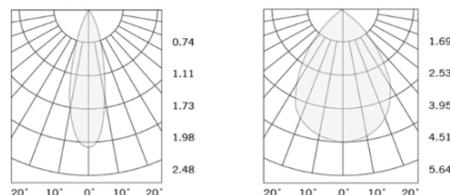

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96839340.50 27K 23D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	23D - 23°	8->80	1 - ON/OFF	W-White
30K - 3000K	50D - 50°	9->90	2 - 0/1-10V	B-Black
40K - 4000K			3 - DALI	
50K - 5000K			4 - Phase Dimming	
57K - 5700K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C