
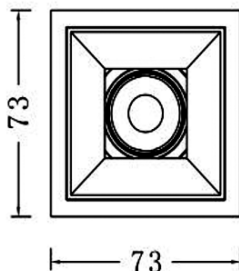


VERGO

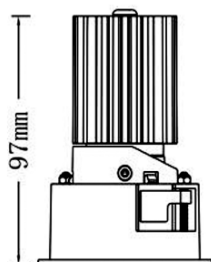

Features:

VIRGO Recessed adjustable downlight, die cast aluminum body with PC Lens, honey Comb/ Spread Lens/ Solite Lens
Product has good design with the low glare reflector (Gloss Black/Dark Chrome/Specular/Matt Black/Matt White/Matt Gold) and can be tiltable up to 20°.
Product can be with IP44, or any other IP as your requirements.
It has fire retardant cotton, and excellent heat dissipation.
High light Transmissivity.
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220- 240V AC, 60/50Hz.
Wattage: 8-12W
High Lumen: 80lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at ta 25°C
(L80/B10)

Fields of Application:

Retail
Education
Galleries hotels
Living spaces


Installation Method:

Recessed Adjustable.

Wattage(W)	:	8	12			
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	15°	24°	36°	60°	
CRI	:	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color and Finish on request

Product Code (96707312.60):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut Out  (mm)
8	640LM	73x73x97	65
12	960LM	73x73x97	65

*Luminous Lux value is calculated for 4000K CRI>80

Photometric:

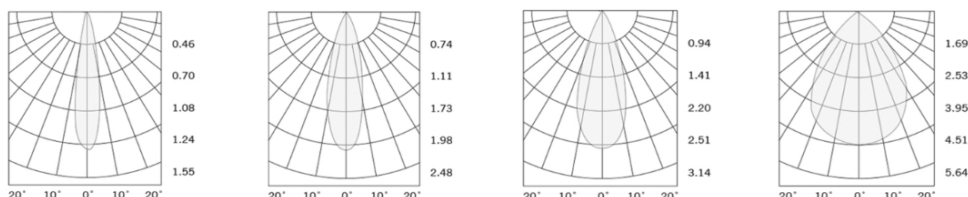

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96707312.60 27K 15D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	9->90	1 - ON/OFF	W-White
30K - 3000K	24D - 24°		2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	
50K - 5000K	60D - 60°		4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C