


VIBE



Features:

- VIBE Recessed fixed downlight, with die cast aluminum body and Anodized Aluminum Reflector and Glass Diffuser.
- Thermally engineered heatsink creates highly efficient passive cooling system.
- Anti-glare accessory provides maximum eye comfort.
- Easy installation.
- Homogenous, well-balance light dispersing, no shadow.

Technical Specifications:

- Input Voltage: 220- 240 V AC, 50 Hz.
- Wattage: 20-28W
- High Lumen: 110lm/w
- 3 STEP Mac Adam
- High efficiency, low flicker driver
- Lamp Type: COB
- Operating Temperature: -20°C to 45°C
- Glow Wire Test 850° C
- Warranty : 5 Years
- Life Time : 50,000hrs at ta 25°C (L80/B10)

Fields of Application:

- Retail
- Education
- Galleries hotels
- Living spaces

Installation Method:

- Recessed

Wattage(W)	:	20	28			
Finish	:	White(W)	Black(B)	Gray(G)		
Kelvin*	:	2700K	3000K	4000K	5000K	5700K 6500K
Beam Angle	:	20°	30°	50°		
CRI	:	80+	90+	95+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color and Finish on request

Product Code (96812528):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out (mm)
20	2200LM	125x110	115
28	3080LM	125x110	115

*Luminous lux value is calculated for 4000K CRI>80

Photometric:

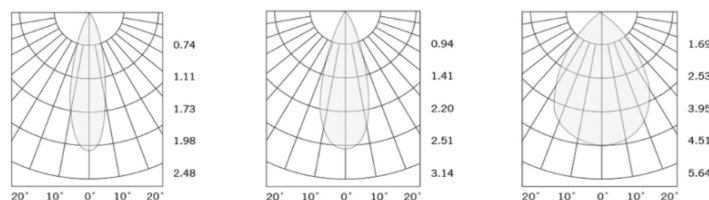

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96812528 27K 20D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	20D - 20°	8->80	1 - ON/OFF	W-White
30K - 3000K	30D - 30°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	50D - 50°	9->95	3 - DALI	G-Gray
50K - 5000K			4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	
65K - 6500K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C