



VIBE PRO



Features:

EVA downlight simple and easy appearance, in line with contemporary aesthetic concept.
 The lamp body adopts high-pressure Die-cast aluminum.
 High reflectance aluminum reflector for extend long service lifetime.
 High light Transmissivity (upto 90%).
 Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
 Wattage: 15 - 20W
 High Lumen: 110lm/w
 3 STEP Mac Adam
 High efficiency, low flicker driver
 Lamp Type: COB
 Chip Brand: VS
 Driver Brand: VS
 Operating Temperature: -20°C to 50°C
 Glow Wire Test 850° C
 Warranty: 5 Years
 Life Time: 100,000hrs at ta 25°C (L80/B10).

Fields of Application:

Retail
 Galleries hotels
 Living spaces
 Conference rooms
 Counters
 Restaurants

Installation Method:

Recessed.

Wattage(W)	:	15	20			
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	3500K	4000K	5700K
Beam Angle	:	15°	24°	45°	60°	
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color & Finish on request

Product Code (96811020):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out (mm)
15	1650LM	110X92.2	100
20	2200LM	110X92.2	100

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

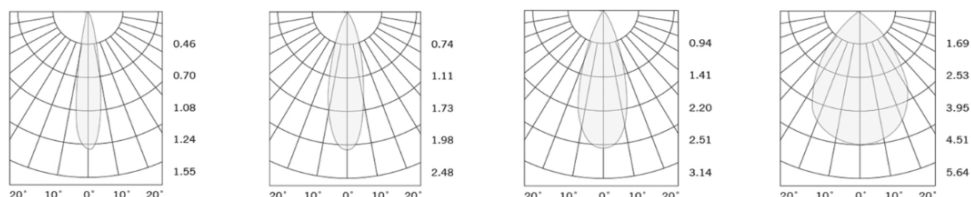

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards:

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96811020 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
35K - 3500K	45D - 45°		3 - DALI	
40K - 4000K	60D - 60°		4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C