




## VLOX



### Features:

VLOX is Adjustable spotlight with die-cast aluminum body, seamlessly integrated into the ceiling to provide a clean and elegant lighting effect.

This lighting fixture is designed to deliver focused and efficient illumination while maintaining a sleek architectural appearance.

Provides 30° rotation and 25° tilt for precise beam adjustment.

The fixture structure ensures UGR < 19, delivering comfortable, glare-controlled lighting.

High light Transmissivity.

Homogenous, well-balanced light dispersing, no shadow.

### Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.

Wattage: 10-15W

High Lumen: 90lm/W

2 / 3 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type: COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty: 5 Years

Life Time: 50,000hrs at ta 25°C (L90/B10).

### Fields of Application:

- Retail
- Galleries hotels
- Living spaces
- Conference rooms
- Counters
- Restaurants

### Installation Method:

Recessed Adjustable.

Wattage(W)	:	10	13	15		
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	3500K	4000K	5700K
Beam Angle	:	21°	25°	39°	53°	
CRI	:	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


\*Special Color & Finish on request

### Product Code (97707515.50):

Wattage	Lumens(lm)	Dimension(ØxH) mm	Cut Out (mm)
10	900LM	75x109	65
13	1170LM	75x109	65
15	1350LM	75x109	65

\*Luminous flux value is calculated for 4000K CRI>90

### Photometric:

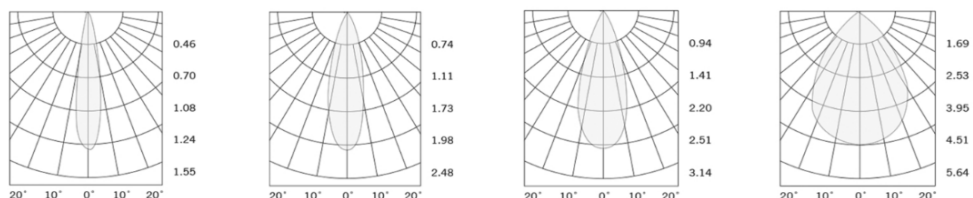

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

## Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 97707515.50 27K 21D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	21D - 21°	9->90	1 - ON/OFF	W-White
30K - 3000K	25D - 25°		2 - 0/1-10V	B-Black
35K - 3500K	39D - 39°		3 - DALI	
40K - 4000K	53D - 53°		4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C