


VLOX

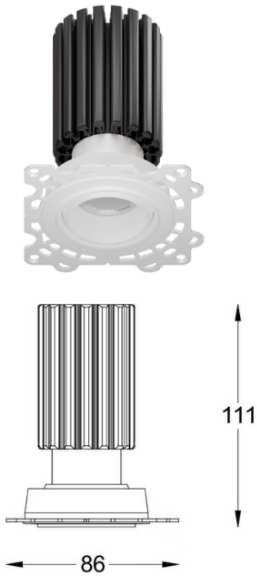

Features:

VLOX is Adjustable Trimless spotlight with die-cast aluminum body, seamlessly integrated into the ceiling to provide a clean and elegant lighting effect.
 This lighting fixture is designed to deliver focused and efficient illumination while maintaining a sleek architectural appearance.
 Provides 30° rotation and 25° tilt for precise beam adjustment.
 The fixture structure ensures UGR < 19, delivering comfortable, glare-controlled lighting.
 High light Transmissivity.
 Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
 Wattage: 9 - 15W
 High Lumen: 90lm/W
 2 / 3 STEP Mac Adam
 High efficiency, low flicker driver
 Lamp Type: COB
 Operating Temperature: -20°C to 45°C
 Glow Wire Test 850° C
 Warranty: 5 Years
 Life Time: 50,000hrs at ta 25°C (L90/B10).

Fields of Application:

Retail
 Galleries hotels
 Living spaces
 Conference rooms
 Counters
 Restaurants


Installation Method:

Recessed Adjustable.

Wattage(W)	:	9	13	15		
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	3500K	4000K	5700K
Beam Angle	:	21°	25°	39°	53°	
CRI	:	90+				
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth

*Special Color & Finish on request

Product Code (97708613.60):

Wattage	Lumens(lm)	Dimension(LxWxH) mm	Cut Out  (mm)
9	810LM	86x86x111	65
13	1170LM	86x86x111	65
15	1350LM	86x86x111	65

*Luminous flux value is calculated for 4000K CRI>80

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Photometric:

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 97708613.60 27K 21D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	21D - 21°	9->90	1 - ON/OFF	W-White
30K - 3000K	25D - 25°		2 - 0/1-10V	B-Black
35K - 3500K	39D - 39°		3 - DALI	
40K - 4000K	53D - 53°		4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C