


VRUT I

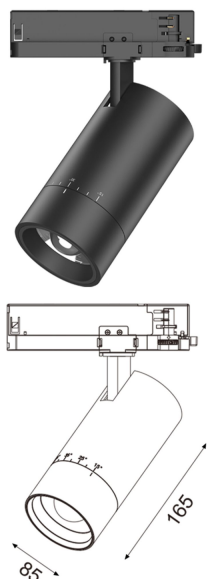

Features:

VRUT Zoomable Track light for installation on mains voltage track.
 Made of high-quality die cast aluminum, Cold forging process on high purity metal, for good heat dissipation and strengthen the housing surface, with PMMA optics Lens for precise lighting effect.
 Adjustable Angle with 355 degrees horizontal rotation, 90 degrees vertical adjustment. It can be in and out from 15 degrees - 60degrees.
 Available with 1-Circuit or 3-Circuit track adapter, ensuring compatibility with a wide range of standard track lighting systems.
 The fixture structure ensures UGR < 19, delivering comfortable, glare-controlled lighting.
 Accurate and efficient light control, Triple anti-glare led track spotlight.
 Universal line voltage led track lighting heads, it in 3 phase 4 wires track systems, and 5 phase 6 wires DALI track system.
 Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.
 Wattage: 25-30W
 High Lumen: 92lm/W
 3 STEP Mac Adam
 High efficiency, low flicker driver
 Lamp Type: COB
 Chip Brand: CREE / Bridgelux
 Driver Brand: VS / Boke
 Operating Temperature: -20°C to 45°C
 Glow Wire Test 850° C
 Power Factor: > 0.9
 Warranty: 5 Years
 Life Time: 50,000hrs at 25°C (L80/B10).

Fields of Application:

Retail
 Education
 Galleries hotels
 Living spaces

Installation Method:

On an electrified track or special base.

Wattage(W)	:	25	28	30			
Finish	:	White(W)	Black(B)	Gray(G)			
Kelvin*	:	2700K	3000K	4000K	5000K	6000K	Tunable White
Beam Angle	:	15°	60°				
CRI	:	80+	90+	95+			
Driver	:	ON/OFF	DALI	Casambi			

*Special Color and Finish on request



Product Code (96508530):

Wattage	Lumens(lm)	Dimension(Ø x H) mm
25	2300LM	85x165
28	2576LM	85x165
30	2760LM	85x165

*Luminous flux value is calculated for 4000K and CRI>90, 3 STEP Mac Adam.

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Photometric:



Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96508530 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	60D - 60°	9->90	2 - DALI	B-Black
40K - 4000K		9->95	3 - Casambi	G-Gray
50K - 5000K				
60K - 6000K				
TuK - Tunable White				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C