



WASHER



Features:

Simple and easy appearance, in line with contemporary aesthetic concept.
The lamp body adopts high-pressure Die-cast aluminum.
Anodized Aluminum reflector with beam of NB/MB .
High light Transmissivity (upto 90%).
Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
Wattage: 30 - 42 W
High Lumen : 115lm/w
3 STEP Mac Adam
High efficiency, low flicker driver
Lamp Type: COB
Operating Temperature: -20°C to 45°C
Glow Wire Test 850° C
Warranty: 5 Years
Life Time: 50,000hrs at ta 25°C
(L80/B10)

Fields of Application:

Retail
Galleries hotels
Living spaces
Conference rooms
Counters
Restaurants

Installation Method:

Recessed Adjustable.

Wattage(W)	:	30	35	42		
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	24°	36°	45°	60°	
CRI	:	80+	90+			
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth


*Special Color & Finish on request

Product Code (96819042.50):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out  (mm)
30	3450LM	190X135	176
35	4025LM	190X135	176
42	4830LM	190X135	176

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

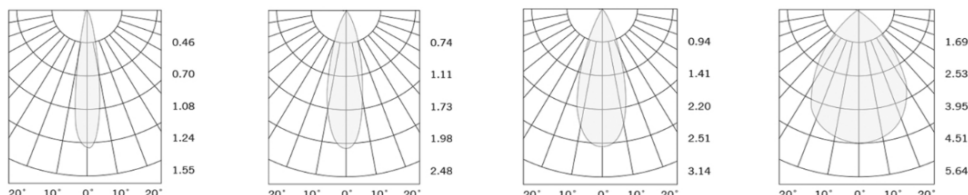

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: ~~96819042.50~~ 27K 24D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	24D - 24°	8->80	1 - ON/OFF	W-White
30K - 3000K	36D - 36°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	45D - 45°		3 - DALI	
50K - 5000K	60D - 60°		4 - Phase Dimming	
57K - 5700K			5 - Bluetooth	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C