

WAVEX



Features:

WAVEX is decorative suspended luminaire in high quality of aluminum body and PCS optics lens (Narrow, medium and wide beam angle available)
 Good glare reduction due to recessed light points out, have different beam angle for selected.
 Can be 350° rotatable and 90° tiltable, can meet different area lighting requirements.
 The product also available with a range of accessories, including a honeycomb louvre for superior glare control, linear spread glass for elongated light distribution, and clear glass for maximum output and clarity.
 This combination of refined design, advanced optics.
 High light Transmissivity.
 Homogenous, well-balanced light dispersing, no shadow.

Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.
 Wattage: 13-15W
 High Lumen: 100lm/w
 3 STEP Mac Adam
 High efficiency, low flicker driver
 Lamp Type: COB
 Operating Temperature: -20°C to 45°C
 Glow Wire Test 850° C
 Warranty: 5 Years
 Life Time: 50,000hrs at 25°C (L80/B10)

Fields of Application:

Retail
 Education
 Galleries hotels
 Living spaces
 Conference rooms
 Counters
 Restaurants

Installation Method:

Suspended

Wattage(W)	:	13	15		
Finish	:	White(W)	Black(B)	Silver (S)	
Kelvin*	:	2700K	3000K	4000K	5000K
Beam Angle	:	20°	24°	36°	43°
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming


*Special Color & Finish on request

Product Code (96804515):

Wattage	Lumens(lm)	Dimension(ØxH) mm
13	1300LM	45x125
15	1500LM	45x125

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

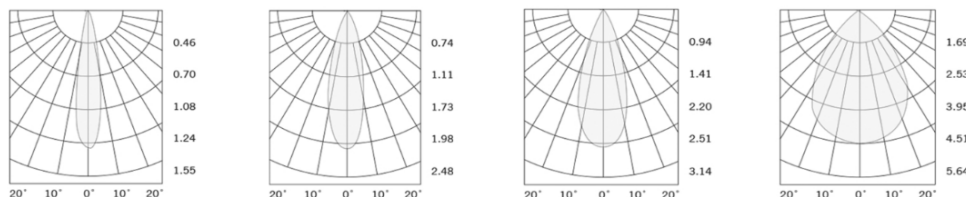

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96804515 27K 20D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	20D - 20°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	S-Silver
50K - 5000K	43D - 43°		4 - Phase Dimming	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C