

## WAVEX



### Features:

WAVEX is decorative suspended luminaire in high quality of aluminum body and PCS optics lens (Narrow, medium and wide beam angle available)  
 Good glare reduction due to recessed light points out, have different beam angle for selected.  
 Can be 350° rotatable and 90° tiltable, can meet different area lighting requirements.  
 The product also available with a range of accessories, including a honeycomb louvre for superior glare control, linear spread glass for elongated light distribution, and clear glass for maximum output and clarity.  
 This combination of refined design, advanced optics.  
 High light Transmissivity.  
 Homogenous, well-balanced light dispersing, no shadow.

### Technical Specifications:

Input Voltage: 220-240 V AC, 50 Hz.  
 Wattage: 23-25W  
 High Lumen: 100lm/w  
 3 STEP Mac Adam  
 High efficiency, low flicker driver  
 Lamp Type: COB  
 Operating Temperature: -20°C to 45°C  
 Glow Wire Test 850° C  
 Warranty: 5 Years  
 Life Time: 50,000hrs at 25°C (L80/B10)

### Fields of Application:

Retail  
 Education  
 Galleries hotels  
 Living spaces  
 Conference rooms  
 Counters  
 Restaurants

### Installation Method:

Suspended

Wattage(W)	:	23	25		
Finish	:	White(W)	Black(B)	Silver (S)	
Kelvin*	:	2700K	3000K	4000K	5000K
Beam Angle	:	20°	31°	43°	52°
CRI	:	80+	90+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming


\*Special Color & Finish on request

### Product Code (96805525):

Wattage	Lumens(lm)	Dimension(ØxH) mm
23	2300LM	55x140
25	2500LM	55x140

\*Luminous flux value is calculated for 4000K CRI>80

### Photometric:

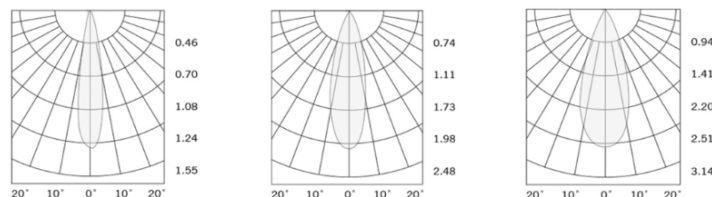

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

## Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96805525 27K 20D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	20D - 20°	8->80	1 - ON/OFF	W-White
30K - 3000K	31D - 31°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	43D - 43°		3 - DALI	S-Silver
50K - 5000K	52D - 52°		4 - Phase Dimming	

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C