


WILEY

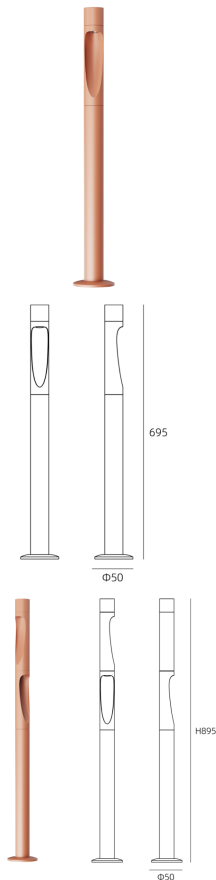

Description:

WILEY is a modern Bollard Light combines functionality with architectural elegance.

The fixture is constructed from durable extruded aluminum housing, offering excellent corrosion resistance and long-lasting performance.

Designed for maximum flexibility, It can be customized with either a single light source or dual light sources depending on the bollard height and project requirements.

Available in a range of refined RAL finishes including Black (RAL 9011), Concrete Grey (RAL 7023), Metallic Grey (RAL 7011), and Grey (RAL 9023) to complement a variety of urban design aesthetics. C5 Marine Grading Available on Request.

The Length available with 400mm, 695mm, 895mm, 1200mm and other lengths can be customized as your project requirements.

A perfect solution for projects that demand versatility, reliability, and modern appeal in outdoor lighting.

Product Specifications:

Housing : Die cast Aluminium
 Diffuser : Polycarbonate
 Coating: Powder Coating
 Gasket: Moulding shaped silicone seal
 Power Cable: 0.5 mtr. power cable included
 Driver : High efficiency, low flicker driver
 Installation Type: Surface Mounted
 Adjustable: No
 Warranty: 5 Years

Technical Specifications:

Wattage: 5 - 10W
 Voltage: 24VDC
 Frequency: 50-60Hz
 Light Source: CREE
 Lumen: 60lm/W
 Mac Adam: 3 Step
 Safety Class: III
 Working Temperature: -30°C to 45°C
 Life Time: 50,000hrs (L70/B50) at 25°C

Parameter:

Wattage(W)	: 5W / 10W
Finish	: RAL 9011 (B) / RAL 7023 (CG) / RAL 7011 (MG) / RAL 9023 (G)
Kelvin*	: 2700K/ 3000K / 3500K / 4000K
Optics	: 15° / 24° / 36°
CRI	: 90+
Control Mode	: ON/OFF / DALI

Order Code:




Product Code	Wattage	CCT	Voltage(DC)	Optics	Finish	Control Mode
547051	05 - 5W (1*5W)	27-2700K	D - 24VDC	15 - 15°	B-RAL 9011	1-ON/OFF
	10 - 10W (2*5W)	30-3000K		24 - 24°	CG-RAL 7023	2-DALI
		35-3500K		36 - 36°	MG-RAL 7011	
		40-4000K			G-RAL 9023	

Ex: Order Code: 5470510527D'15B1

Standards :

EN 60598-1
 EN 60598-2-2
 EN 60598-3-2
 EN 60598-3-3

Photometric:



Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C