


## WOFL



### Features:

WOLF Deep Recessed Spotlight is designed with high-quality lighting with a clean and discreet appearance.  
High quality of die cast aluminum body and PMMA Lens, for soft and even light distribution available upon request, SS spring Clips.  
Product has the structure and appearance Ensures UGR<19.  
The customized finished available as your requested.  
High light Transmissivity.  
Homogenous, well-balanced light dispersing, no shadow.

### Technical Specifications:

Input Voltage: 220- 240 V AC, 50 Hz.  
Wattage: 7-10W  
High Lumen: 105lm/w  
3 STEP Mac Adam  
High efficiency, low flicker driver  
Lamp Type: COB  
Operating Temperature: -20°C to 45°C  
Glow Wire Test 850° C  
Warranty: 5 Years  
Life Time: 50,000hrs at ta 25°C  
(L80/B10)

### Fields of Application:

Retail  
Education  
Galleries hotels  
Living spaces


### Installation Method:

Recessed

Wattage(W)	:	7	10			
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	4000K	5000K	5700K
Beam Angle	:	15°	24°	36°	60°	
CRI	:	80+	90+	95+		
Driver	:	ON/OFF	0/1-10V	DALI	Phase Dimming	


\*Special Color and Finish on request

### Product Code (96705210):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out  (mm)
7	760LM	51x68	45
10	950LM	51x68	45

\*Luminous flux value is calculated for 4000K CRI>80

### Photometric:

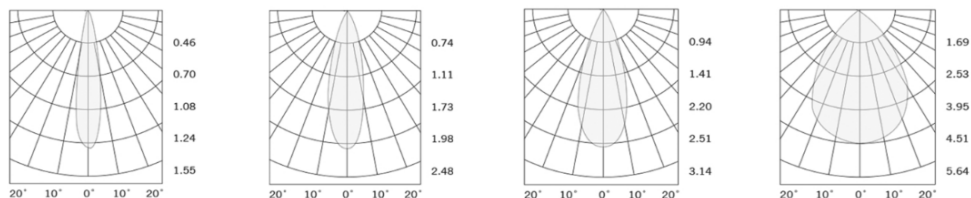

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at  $\pm 5\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96705210 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°	9->95	3 - DALI	
50K - 5000K	60D - 60°		4 - Phase Dimming	
57K - 5700K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C