


ZINO

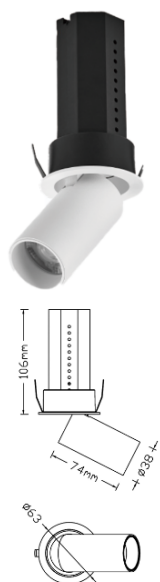

Features:

ZINO is Recessed adjustable Spotlight made from die-cast aluminum with a solvent-free powder coating for durability and eco-friendliness.

It features a PC (polycarbonate) lens to ensure even light distribution.

The design incorporates the structure optimizing the light's focusing on more precision, along with a narrow output for a concentrated beam.

The spotlight supports different beam angles to suit various lighting needs and can be tilted up to 90°, making it versatile for focused or ambient lighting

Additionally, it has a telescoping mechanism, allowing it to adjust vertically, enhancing its flexibility in directing light exactly where needed.

Technical Specifications:

Input Voltage: 220- 240 V AC, 50/60Hz.

Wattage : 8W

High Lumen : 80lm/w

Light source: Citizen CLU02Q-1202

2 STEP Mac Adam

High efficiency, low flicker driver

Lamp Type : COB

Operating Temperature: -20°C to 45°C

Glow Wire Test 850° C

Warranty : 5 Years

Lifetime 50,000hrs at a 25°C(L90/B10)

Fields of Application:

Retail

Education

Galleries hotels

Living spaces

Museums

Restaurants

Painting Exhibitions

Installation Method:

Recessed Adjustable

Wattage(W)	:	8				
Finish	:	White(W)	Black(B)			
Kelvin*	:	2700K	3000K	3500K	4000K	5700K
Beam Angle	:	18°	24°	36°	50°	
CRI	:	90+				
Driver	:	ON/OFF	DALI	Phase Dimming		


*Special Color and Finish on request

Product Code (96703808.50):

Wattage	Lumens(lm)	Dimension (WxØxH) mm	Cut Out  (mm)
8	640LM	63x38x74	55

*Luminous lux value is calculated for 4000K CRI>90

Photometric:

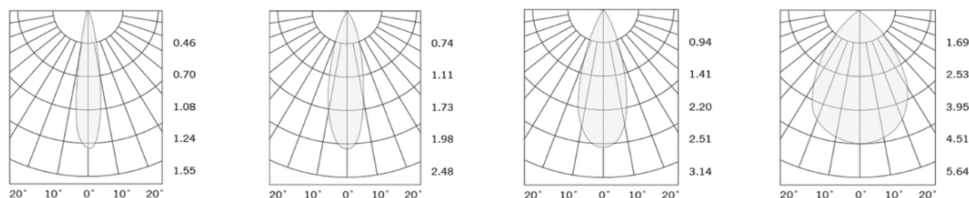

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C

- Standards
- EN 60598-1
- EN 60598-2-2
- EN 60598-2-22
- EN 60598-3-2
- EN 60598-3-3

Order Code Ex: 96703808.50 27K 18D 9 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	18D - 18°	9-	1 - ON/OFF	W-
30K - 3000K	24D - 24°	>90	2 - DALI	White
35K - 3500K	36D - 36°		3 - Phase	B-
40K - 4000K	50D - 50°		Dimming	Black
57K - 5700K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C