


ZIZO



Features:

- Simple and easy appearance, in line with contemporary aesthetic concept.
- Die Cast Aluminum body with solvent free power coated, PC Lens .
- Solvent Free Power Coating with RAL 9003, RAL 9004, Reflectors with Matt White, Matt Black and other special finish on request.
- Anti-glare reflector with excellent light dispersion
- High thermal conductivity double-sided aluminum substrate.
- High light Transmissivity.
- Homogenous, well-balanced, no shadow

Technical Specifications:

- Input Voltage : 220- 240 V AC, 50 Hz.
- Wattage : 10 -12 W
- High Lumen : 120lm/w
- 3 STEP Mac Adam
- High efficiency, low flicker driver
- Lamp Type : COB
- Operating Temperature: -20°C to 45°C
- Glow Wire Test 850° C
- Warranty : 5 Years
- Life Time : 50,000hrs at 25°C (L80/B10).

Fields of Application:

- Retail
- Galleries hotels
- Living spaces
- Conference rooms
- Counters
- Restaurants

Installation Method:

- Recessed Stretch Adjustable

Wattage(W) :	10	12				
Finish :	White(W)	Black(B)				
Kelvin* :	2700K	3000K	4000K	5000K	6000K	6500K
Beam Angle :	15°	24°	36°	60°		
CRI :	80+	90+				
Driver :	ON/OFF	0/1-10V	DALI	Phase Dimming	Bluetooth	


*Special Color & Finish on request

Product Code (96806512.50):

Wattage	Lumens(lm)	Dimension(Ø x H) mm	Cut Out (mm)
10	1200LM	65x90	55
12	1440LM	65x90	55

*Luminous flux value is calculated for 4000K CRI>80

Photometric:

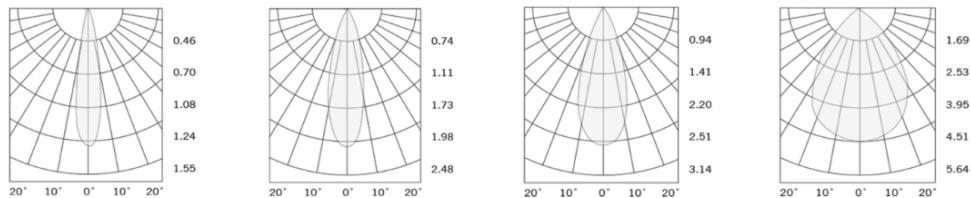

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at ±5%. Unless stated otherwise, the values apply to an ambient temperature of 25°C

Standards

EN 60598-1

EN 60598-2-2

EN 60598-2-22

EN 60598-3-2

EN 60598-3-3

Order Code Ex: 96806512.50 27K 15D 8 1 W

CCT	Beam Angle	CRI	Driver	Finish
27K - 2700K	15D - 15°	8->80	1 - ON/OFF	W-White
30K - 3000K	24D - 24°	9->90	2 - 0/1-10V	B-Black
40K - 4000K	36D - 36°		3 - DALI	
50K - 5000K	60D - 60°		4 - Phase Dimming	
60K - 6000K			5 - Bluetooth	
65K - 6500K				

Pluxb luminaires are developed with globally recognized and tested components suppliers, however as per international standards tolerance in initial flux and connected load is at $\pm 5\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C